



GM MODULAR PVT. LTD.
203, Shalimar Moya Park,
New Link Road, Andheri (W),
Mumbai- 400 053, Maharashtra, India.
Customer Care No.: 1800 209 1215
Email: info@gmm modular.com




FDCAT00CT23

FACADE LIGHTING COLLECTION | OCT 2023



LET'S MAKE
OUR WORLD
BEAUTIFUL


FACADE LIGHTING COLLECTION | OCT 2023

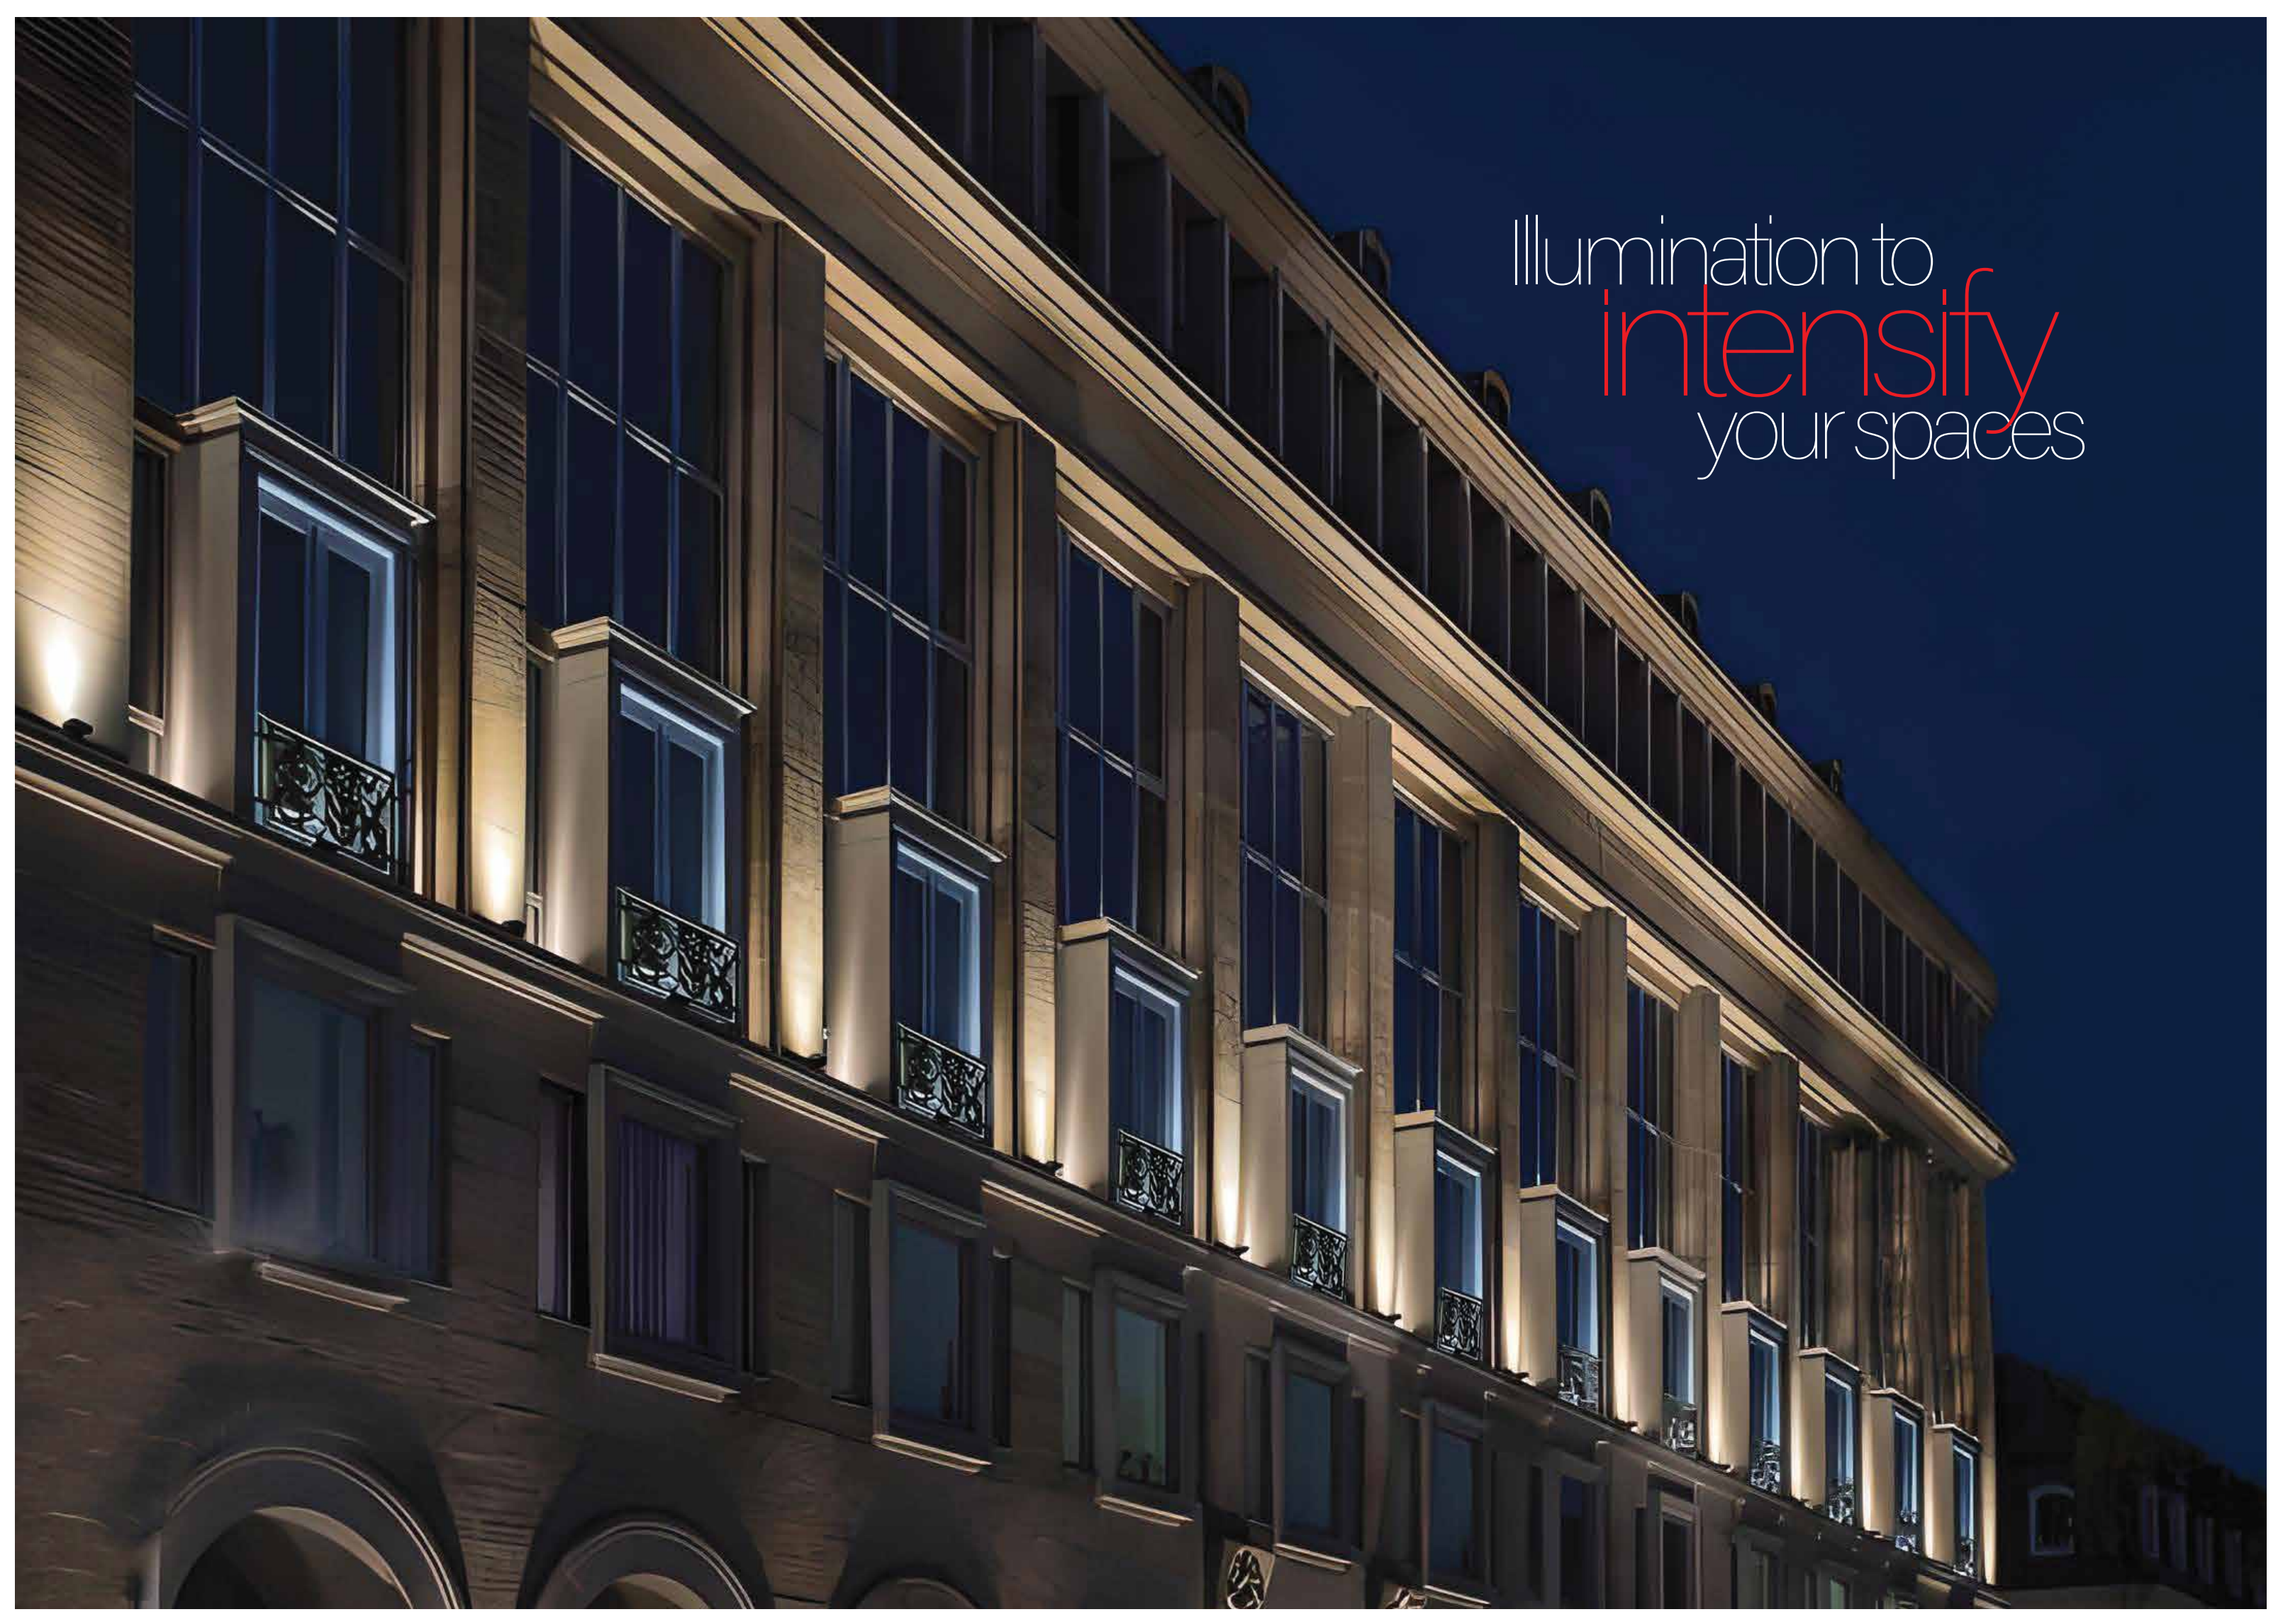A photograph of a multi-story building at night. The building features a series of windows and balconies. Warm, yellowish light is cast from the balconies and under the window sills, creating a glowing effect against the dark night sky. The building's facade is made of light-colored stone or brick. The text "Illumination to intensify your spaces" is overlaid in the upper right corner. "Illumination to" and "your spaces" are in a white, sans-serif font, while "intensify" is in a red, cursive script font.

Illumination to
intensify
your spaces

Relish the luxury it concludes

Being an integral part of GM, I can assure you of its high-quality standards and its dedication to serve you. GM's newest products in the category of Facade Lighting have a profound potential of fully augmenting your living experiences. I, therefore, insist on making the elite choice in technological innovations for your cherished SPACES and empower you to relish the luxury it concludes.

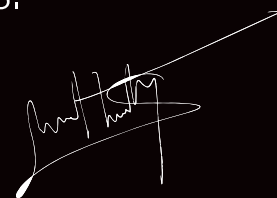

- Suniel Shetty





red**dot** design award design concept

GM has been honoured with the prestigious Red Dot Award, 2023. The Red Dot Award represents excellence in design and innovation, values that have always been at the core of our work at GM. Awarded for a path-breaking product that is an epitome of technological innovation and meticulous craftsmanship; the achievement is a testament to the collective efforts of talented teams at GM.

We at GM look forward to continue innovating and crafting more such products that would set newer benchmarks in the design and innovation industry.



Ideas
that reincarnet the
spaces

Contents



01 PIXEL DOT/
BAR LIGHTS



13 LED
SCREEN



17 WALL WASHER
LIGHTS



29 FLOOD
LIGHTS



39 BAR
LIGHTS



43 WALL
LIGHTS



49 GOBO
LIGHTS



59 INTERACTIVE
PROJECTORS



65 FAN PROJECTION
LIGHTS



71 INGROUND
LIGHTS



79 FOUNTAIN
LIGHTS



95 POOL
LIGHTS



105 GLOW GARDEN
LIGHTS



109 SOLAR
POLE LIGHTS



119 SOLAR STREET
LIGHTS



123 SMART
POLE LIGHTS



127 POLE
LIGHTS



Pixel Dot/ Bar Lights

The GM Pixel Dot Lights and Bar Lights incredibly highlight the best aspects of the buildings and other monumental structures. The illuminated exterior not only adds to the beauty but also aids in making the space well-lit and safe.





Starry Night at Every Turn






LED Pixel Bar

Product Specification	
Product Category	LED Pixel Bar
Product Name	Pixiwar
Product Code	GM-FC-PB-12-BLK-RGB GM-FC-PB-12-BLK-RGBW
Wattage	20W
LED Type	SMD5050 Epistar Brand
CCT	RGB
Power Input	DC 12V
Beam Angle	120°
CRI	70
Signal	SPI (WS2811 SM16703P)
IC Type	SPI WS2812B/SK6812
LEDs/m	48LEDs/16pixels/M
Mode of Connector	33 Pins Connector
Protection Rating	IP66
Working Temperature	-20°C~60°C
Product Dimensions	(L) 1000 x (W) 25 x (H) 27mm





Spill Some Magic

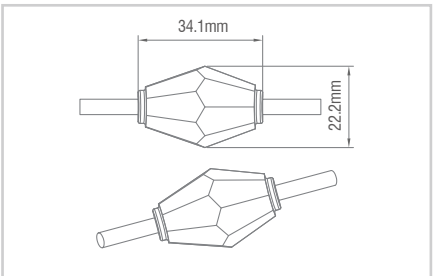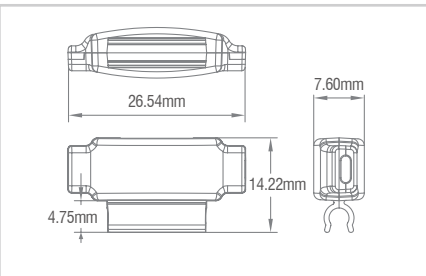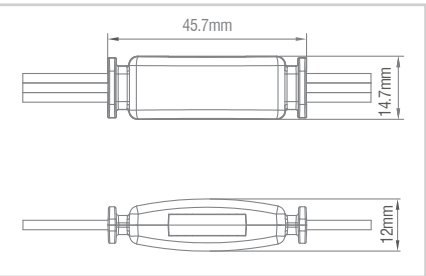

LED Pixel Dot

Product Specification		
Product Category	LED Pixel Dot	
Product Name	Pebble P50	
Product Code	GM-FC-PD-0.35-PEB-WH-RGBW	
LED Type	SMD 5050	
CCT	RGB / RGBW	
Grey Scale	16 bits, 65, 536	
LED Quantity	1	2
Beam Angle	180°	360°
Grust Material	Polycarbonate	
Protection Rating	IP66, Outdoor use	
Working Temperature	-25°C~60°C	
Input Voltage	12V DC	
Current	0.028 Amps	
Power	0.35 W	
Wire Type	3x20# AWG, UV PROTECTED	
Max Distance Before Power Injection	Approx 30 Meters	
Inline Power Injection	Via Power T & 12V Power Supply	
Control System		
Supported Controller	NEC&NDB/WEC/WEC Boss/Other Controllers	
Protocol	SPI/TTL	

Product Specification	
Product Category	LED Pixel Dot
Product Name	Pebble P51
Product Code	GM-FC-PD-0.6-PEB-WH-RGBW
LED Type	SMD3535 / SMD5050
CCT	RGB/RGBW
Grey Scale	16 bits, 65M536 dimming levels*
LED Quantity	4
Beam Angle	360°
Grust Material	Polycarbonate
Protection Rating	IP66, Outdoor use
Working Temperature	-25°C~60°C
Input Voltage	24V DC
Current	0.026 Amps
Power	0.6 W
Wire Type	20AWG, UV Protected
Max Distance Before Power Injection	Approx. 60 Meter
Inline Power Injection	Via Power T+’s & RGB+ 4A-24V
Control System	
Supported Controllers	NEC&NDB/WEC/WEC BOSS/ Other Controls
Protocol	SPI / TTL


Product Specification	
Product Category	LED Pixel Dot
Product Name	Diamond
Product Code	GM-FC-PD-0.35-DIA-WH-RGBW
LED Type	SMD 3535
CCT	RGB
Grey Scale	16 bits, 65,536
LED Quantity	2
Beam Angle	360°
Grust Material	Polycarbonate
Protection Rating	IP20 / IP66 (Option)
Working Temperature	-25°C~60°C
Input Voltage	12V DC
Current	0.028 Amps
Power	0.35 W
Wire Type	20 AWG, UV protected
Max Distance Before Power Injection	Approx. 60 Meter
Inline Power Injection	Via Power T & 12V Power Supply
Control System	
Supported Controllers	NEC&NDB/WEC/WEC-BOSS/Other controls
Protocol	SPI/TTL

Extravagant Illumination



Pearl



LED Pixel Dot

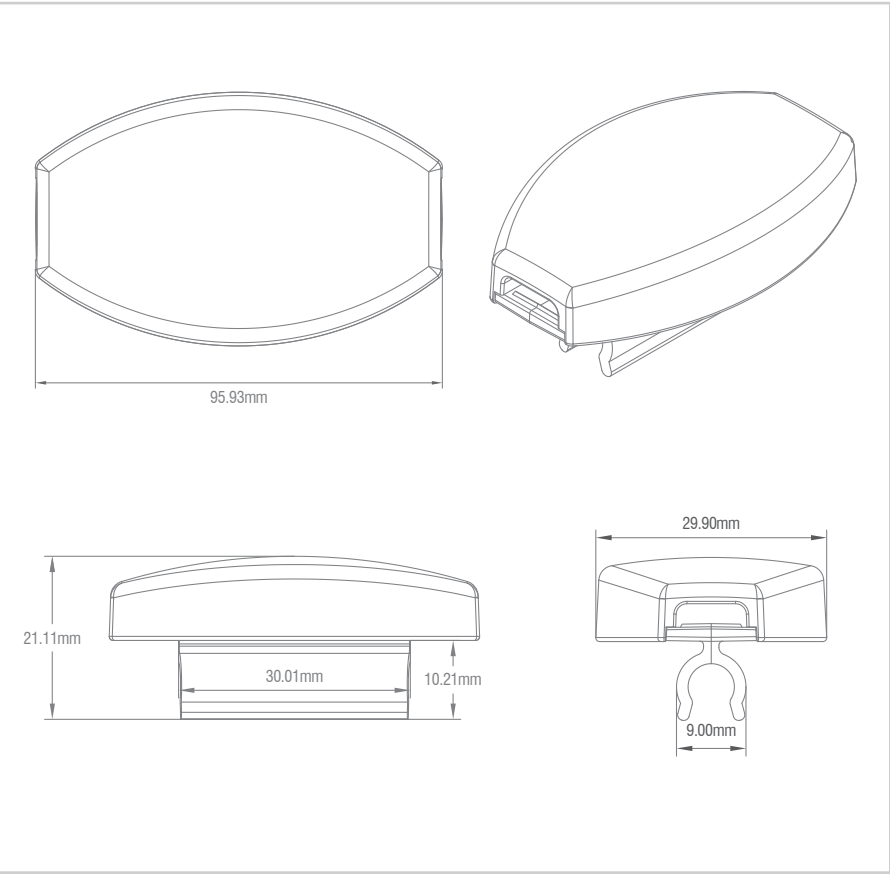

Product Specification	
Product Category	LED Pixel Dot
Product Name	Pearl
Product Code	GM-FC-PD-0.6-PRL-WH-RGBW
LED Type	SMD 3535
CCT	RGB
Grey Scale	16 bits, 65,536
LED Quantity	3
Beam Angle	180°
Grust Material	Polycarbonate
Protection Rating	IP66
Working Temperature	-25°C~60°C
Input Voltage	12V DC
Current	0.028 Amps
Power	0.6W
Wire Type	20 AWG, UV Protected
Max Distance Before Power Injection	Approx. 225 feet
Inline Power Injection	Via Power T & 12V Power Supply
Control System	
Supported Controllers	NEC&NDB/WEC/WEC-BOSS/Other controls
Protocol	SPI/TTL



Glowing Pearls Adorning Facades

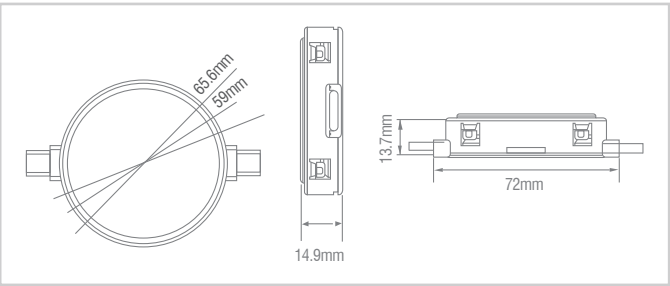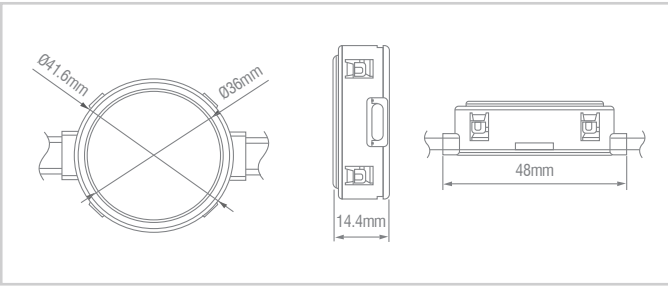

LED Pixel Dot


Product Specification	
Product Category	LED Pixel Dot
Product Name	Dial 1
Product Code	GM-FC-PD-1.4-RD-BLK-RGBW
Product Size	Ø42mm
Single Power	1.4W
CCT	RGB/RGBW
Input Voltage	DC24V
Lamp Chip	3535 Epistar*6
Light-emitting Angle	≥120°
Control Method	SPI/TTL/DMX
Working Temperature	-25°C~60°C
Waterproof Process	All-round glue filling
Protection Rating	IP67
Lamp Spacing	100mm, head and tail male and female M16D connectors 150mm long, 30 pieces in a string
Material	Core 2*0.75mm ² +3*0.3mm ² double-layer sheathed wire, engineering plastic+PC, high and low temperature resistance, UV resistance, flame retardant material 94-V0

Product Specification	
Product Category	LED Pixel Dot
Product Name	Dial 2
Product Code	GM-FC-PD-2.4-RD-WH-RGBW
Product Size	Ø65mm
Single Power	2.4W
CCT	RGB/RGBW
Input Voltage	DC24V
Lamp Chip	3535 Epistar*12
Light-emitting Angle	≥120°
Control Method	SPI/TTL/DMX
Working Temperature	-25°C~60°C
Waterproof Process	All-round glue filling
Protection Rating	IP67
Lamp Spacing	150mm, head and tail male and female M16D connectors 150mm long, 30 pieces in a string
Material	Core 2*0.75mm ² +3*0.3mm ² double-layer sheathed wire, engineering plastic+PC, high and low temperature resistance, UV resistance, flame retardant material 94-V0

In a Bright Harmony




LED Pixel Dot

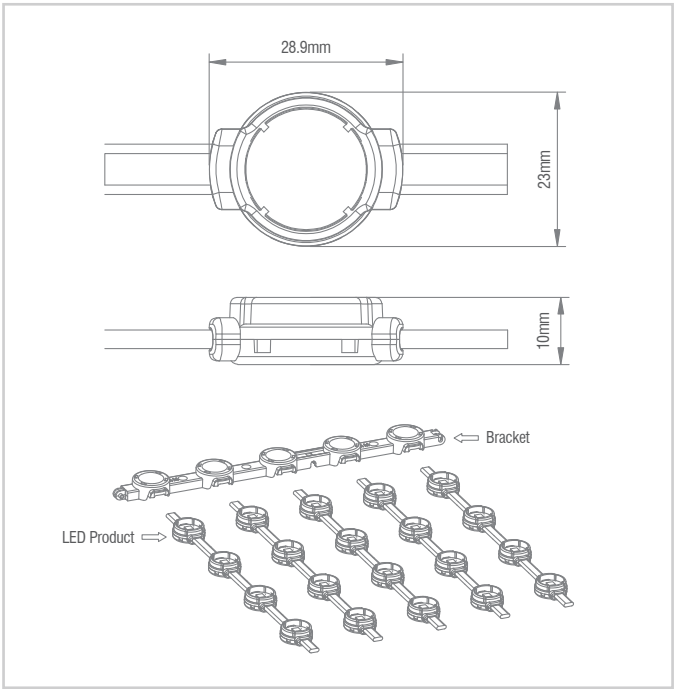

Product Specification	
Product Category	LED Pixel Dot
Product Name	Mesh
Product Code	GM-FC-PD-0.3-GRD-BLK-RGBW
Product Size	Grid Pixel Light
Single Power	0.3 W
CCT	RGB/RGBW
Input Voltage	12V DC
Lamp Chip	SMD 3535
Light-emitting Angle	180°
Control Method	SPI/TTL/DMX
Working Temperature	-25°C~60°C
Waterproof Process	All-round Glue Filling
Protection Rating	IP66, Outdoor Use
Max Lights Before Power Injection	Approx 125 Lights
Max Distance Before Injection	Approx 30 Meters
Inline Power Injection	Via Power T& 12V Power Supply
Material	Polycarbonate

LED Screen

A powerful cluster of small LEDs joined together brings a bigger picture to life. The vibrant colours and harmonious design make projecting life-size images and animations easy and attractive.

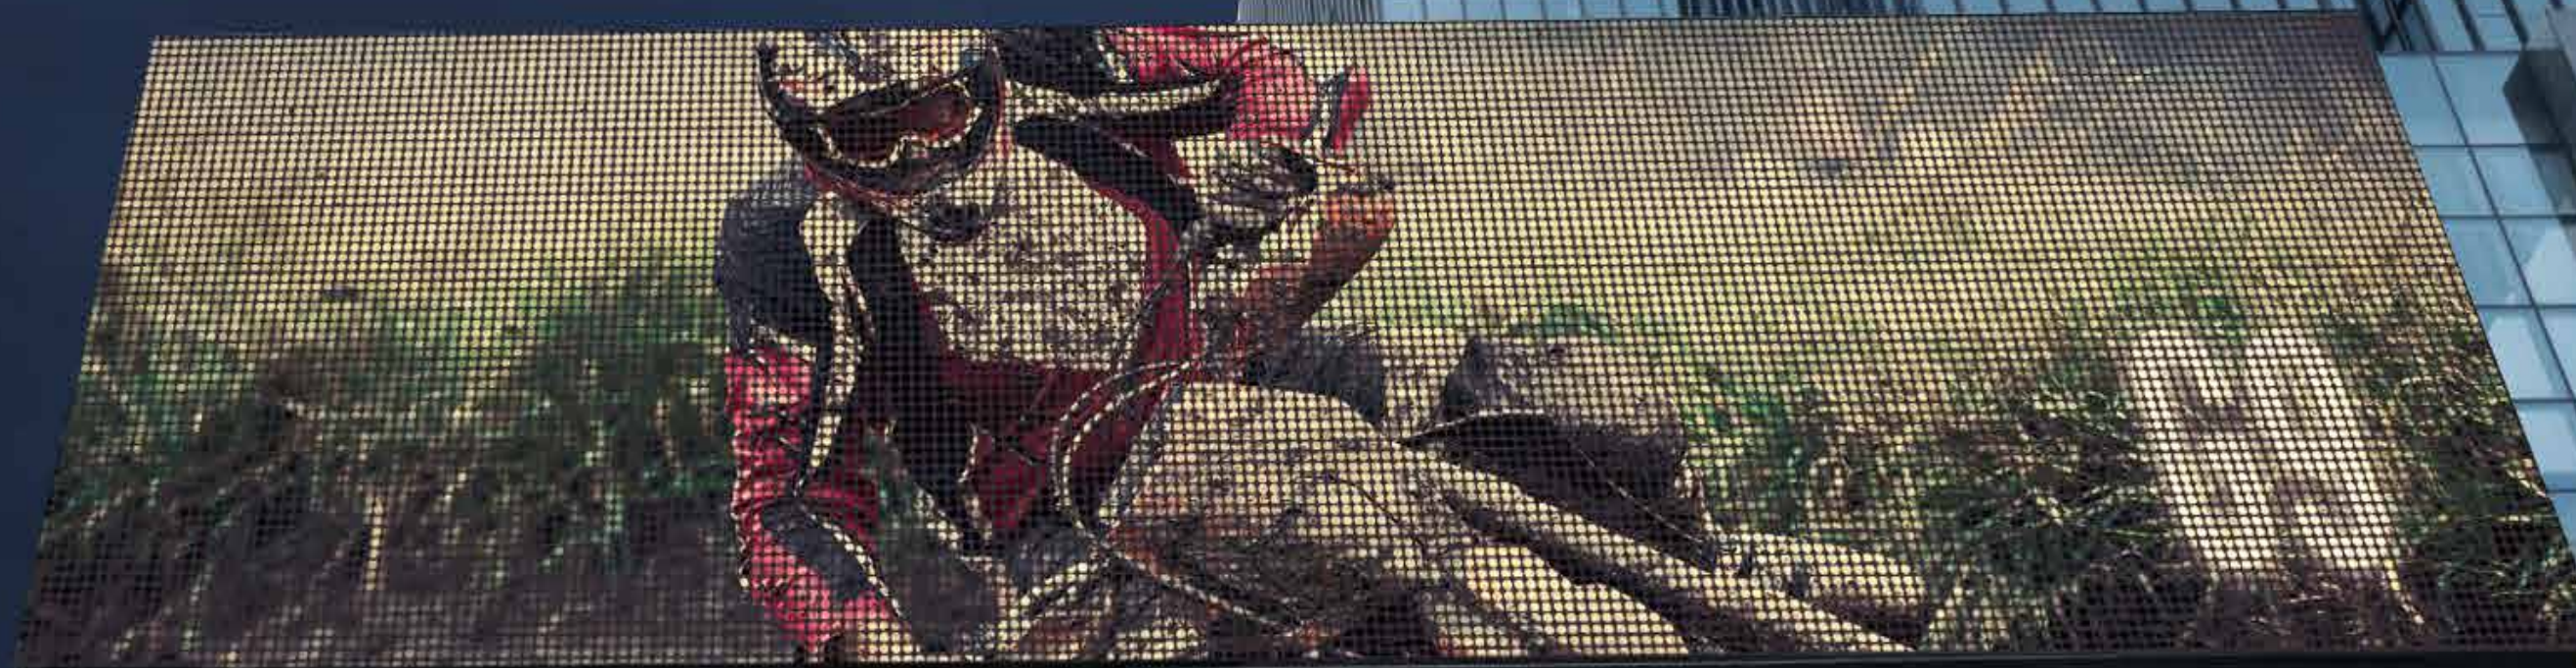

Give Your Ideas a Colourful Expression



Cine

LED Display Screen

Product Specification		
Product Category	LED Display Screen	
Product Name	Cine	
LED Type	SMD 2020	SMD 1921
Brightness (nits)	5500	1000
Pixel Pitch/mm	2.604, 3.91	3.91, 4.8, 6
Module Resolution	96x96 Pixel	64x64 Pixel
Frame Material	Die-cast Aluminium	Die-cast Aluminium
Protection Rating	IP20	IP65
Average Input Power	≈300 W/m2	≈300 W/m2
Power Frequency	50/60 Hz	50/60 Hz
Lifespan	1,00,000 H	1,00,000 H
Product Dimensions	500x500x71 mm	500x500x71 mm



Wall Washer Lights

The GM Wall Washer Lights adorn your walls with an aesthetic glow. The lights have an elegant make and provide the perfect illumination for modern exteriors.


Beaming Exteriors Make Brighter Evenings

Wall Graze Series LED-based luminaires are designed with custom optics to achieve different spread from narrow to wide beam options. Linear fixtures with beautified aesthetics deliver an excellent grazing effect and offer a wide range of selection of colour temperatures, beam spread options for lighting up your venue. The fixtures can be customised in length from 300mm to 1200mm. Their availability in RAL options ensures the light-bodied fixture blends perfectly with the background.



Neo-wash & Rainbow-wash

Wall Washer

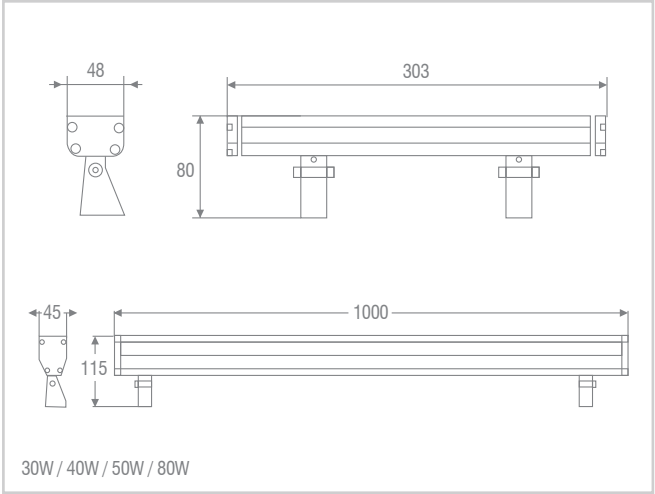

Product Specification	
Product Category	Wall Washer
Product Name	Neo-wash & Rainbow-wash
Product Code	GM-FC-WH-XX-BLK/XXXX
Wattage	20W/ 30W/40W/60W/80W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP66
Beam Angle	15°~60°
CRI	70-80
Control	DMX / AUTO
Power Input	AC 110V-240V, 50 Hz
Body Colour	Black/ White
Housing	Extruded Die-casting Aluminium

* WATTAGE:XX
CCT: XXXX



Painting Your Facades with Radiance



Installation Accessories



Python

Wall Washer

Product Specification	
Product Category	Wall Washer
Product Name	Python
Product Code	GM-FC-FWSH-15-GRY-XXXX
Wattage	15W/meter
CCT	3000K / 4000K / 6000K / RGBW
LED Type	SMD3030
LED Qty.	24 Pcs.
Beam Angle	15° / 25° / 30° / 45°
Light Output Ratio (LOR)	75%
Input Voltage	DC24V
Body Material	Silicon
Protection Rating	IP66
Working Temperature	-20°C~60°C
Product Size	12 x 20 mm

* CCT: XXXX






Travel Through Space and Light



Neo-Flexible

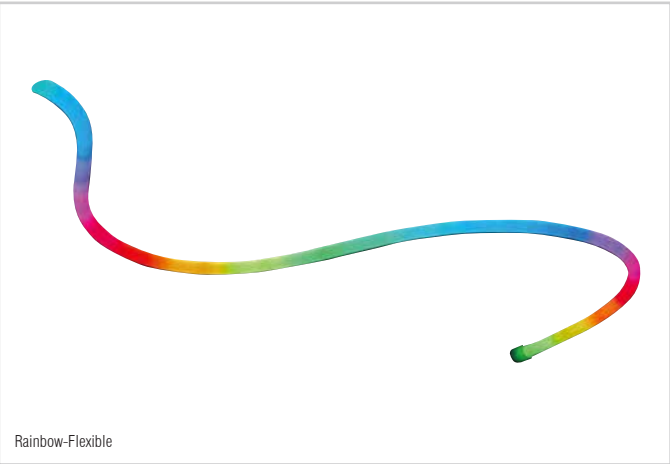

Rainbow-Flexible

Wall Washer



Direct cable output




Bottom cable output

Product Specification	
Product Category	Wall Washer
Product Name	Neo-Flexible
Product Code	GM-FC-NFX-9.6-XXXX
Wattage	9.6W/meter
CCT	3000K / RGB
LED Type	SMD5050
Greyscale	8-bit 256
LED Qty.	60Pcs. / meter
Beam Angle	270°
Protection Rating	IP66
Input Voltage Current	24V DC
Product Size	Ø 25mm
Working Temperature	-20 TO +60°C
Product Size	Ø 25mm

Product Specification	
Product Category	Wall Washer
Product Name	Rainbow-Flexible
Product Code	GM-FC-NFX-5-XXXX
Wattage	5W/meter
CCT	3000K / RGB
LED Type	SMD 5050
Greyscale	16-bit 256
LED Qty.	60Pcs. / meter
Beam Angle	120°
Protection Rating	IP66
Input Voltage Current	24V DC
Product Size	10mm x 23mm
Working Temperature	-20°C~60°C
Product Size	10 x 23mm

* CCT: XXXX

Beam of Brilliance

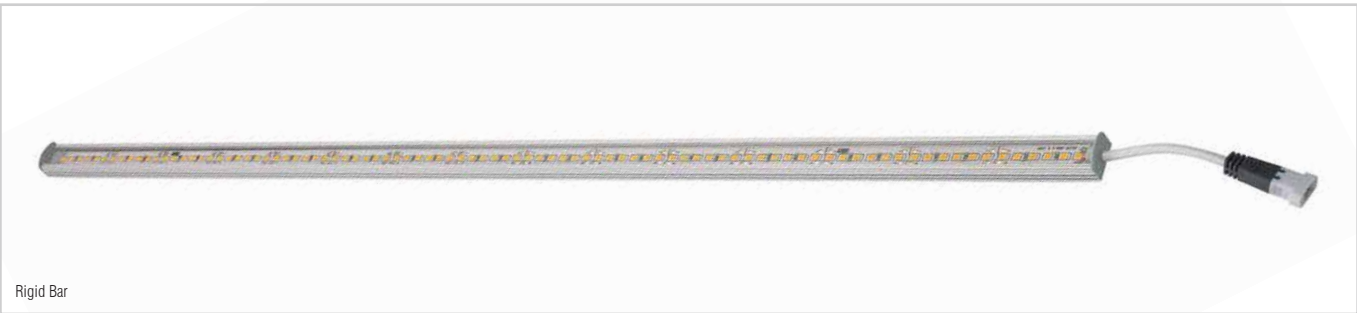

Rigid Bar

Wall Washer

Product Specification	
Product Category	Wall Washer
Product Name	Rigid Bar
Product Code	GM-FC-RGD-15-2200K
	GM-FC-RGD-15-3000K
	GM-FC-RGD-15-4000K
	GM-FC-RGD-25-2200K
	GM-FC-RGD-25-3000K
	GM-FC-RGD-25-4000K
Wattage	15W / 25W
CCT	2200K / 3000K / 4000K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	120°
CRI	80
Housing	Extruded/Aluminium Die-casted
Power Factor	>0.90
Body Colour	Silver/Black Anodizing
Product Dimensions	(L)1000 x (W)17 x (H) 11mm

Radiate to Dazzle and Impress



Aeroy 1



Aeroy 2

Wall Washer

Product Specification	
Product Category	Wall Washer
Product Name	Aeroy 1
Product Code	GM-FC-PH-4-3000K / RGBW
	GM-FC-PH-4-4000K / RGBW
	GM-FC-PH-6-3000K / RGBW
	GM-FC-PH-6-4000K / RGBW
Wattage	4W~6W
CCT	2200K~6500K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°, 20°, 30°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-casted
Body Colour	Silver/Black Anodizing
Product Size	(L) 140 x (W) 46 x (H) 123mm

Product Specification	
Product Category	Wall Washer
Product Name	Aeroy 2
Product Code	GM-FC-PH-10-3000K / RGBW
	GM-FC-PH-10-4000K / RGBW
	GM-FC-PH-15-3000K / RGBW
	GM-FC-PH-15-4000K / RGBW
Wattage	10W~15W
CCT	2200K~6500K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°, 20°, 30°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-casted
Body Colour	Silver/Black Anodizing
Product Size	(L) 335 x (W) 46 x (H) 123mm

Flood Lights

The GM Flood Lights highlight the minute details of a structure and create a larger than life experience for the onlookers. They impart a majestic glow to the surroundings and enhance the glory of the facade.



Complementing Walls and Nights



Flood Light (Pillar Highlighter)


Product Specification	
Product Category	Flood Light (Pillar Highlighter)
Product Name	Sharp 10 / Sharp 20
Product Code	GM-FC-FL-10-2200K/3000K/4000K/6000K GM-FC-FL-20-2200K/3000K/4000K/6000K
Wattage	10W / 20W
CCT	2200K- 6000K
Protection Rating	IP65
Power Input	AC 110V-310V AC
Beam Angle	15°~30°
Control	ON / OFF
CRI	70
Housing	Extruded/Aluminium Die-casted
Body Colour	Grey / White / Black
Product Size (10W)	Ø 71 x 155mm
Product Size (20W)	Ø 90 x 190mm

Highlighting the Exterior Like No Other



Galaxy 1

Flood Light

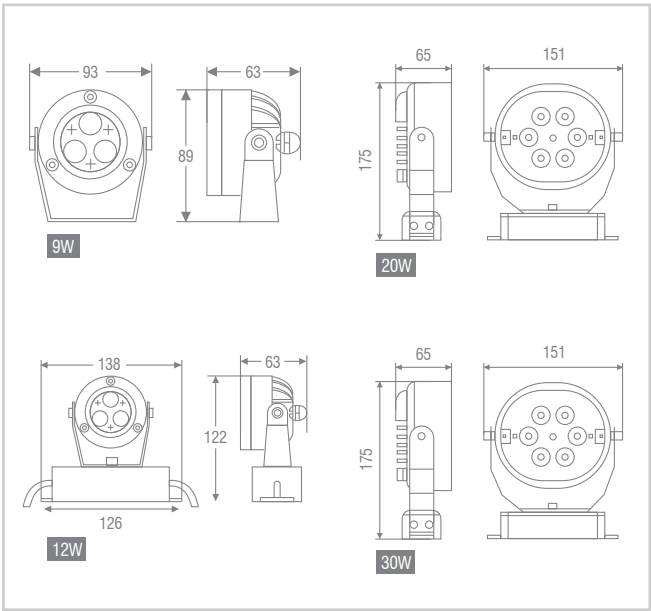


Product Specification	
Product Category	Flood Light
Product Name	Galaxy 1
Product Code	GM-FC-FL-9-RD-3000K/4000K/RGB/RGBW GM-FC-FL-12-RD-3000K/4000K/RGB/RGBW GM-FC-FL-20-RD-3000K/4000K/RGB/RGBW GM-FC-FL-30-RD-3000K/4000K/RGB/RGBW
Wattage	9W / 12W / 20W / 30W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°~60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-casted
Body Colour	Black / White

Glittering Hues for Glowing Nights

Exterior-grade, energy efficient, and compact architectural spot luminaires designed to deliver and highlight structures like pillars and walls. These fixtures have a wide range of colour temperatures, beam spread, and aesthetic colours. The range has been tested for extreme outdoor weather conditions to deliver consistent output. The fixtures are ideal to use for facades, landmarks, parks, landscapes, and bridges. The fixtures have a DC24V shockproof design with required IK protections.



Flood Light

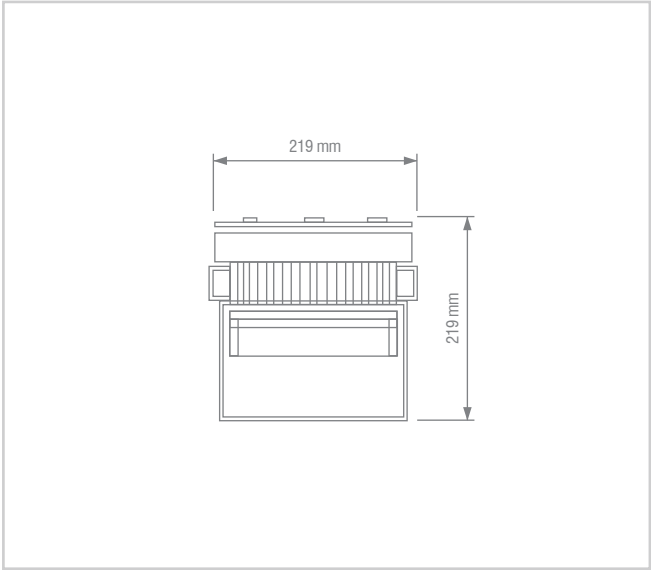


Product Specification	
Product Category	Flood Light
Product Name	Galaxy 2
Wattage	50W / 100W / 150W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°~60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-casted
Body Colour	Black / White
Product Code	GM-FC-FL-50-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-100-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-150-RD-3000K/4000K/RGB/RGBW

Lighting Up to Mesmerise



Galaxy 3

Flood Light

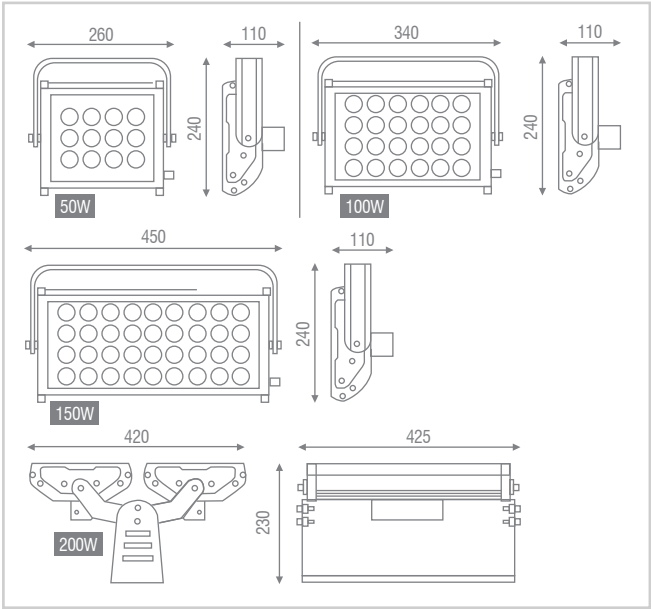


Product Specification	
Product Category	Flood Light
Product Name	Galaxy 3
Wattage	50W / 100W / 150W / 200W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°~60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-casted
Body Colour	Black / White
Product Code	GM-FC-FL-50-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-100-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-150-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-200-REC-3000K/4000K/RGB/RGBW



Bar Lights

The GM Bar Light is sleek and absolutely gorgeous light that outlines and accentuates every edge of the structure. Its minimalistic design blends seamlessly with the facade and creates an enthralling experience.



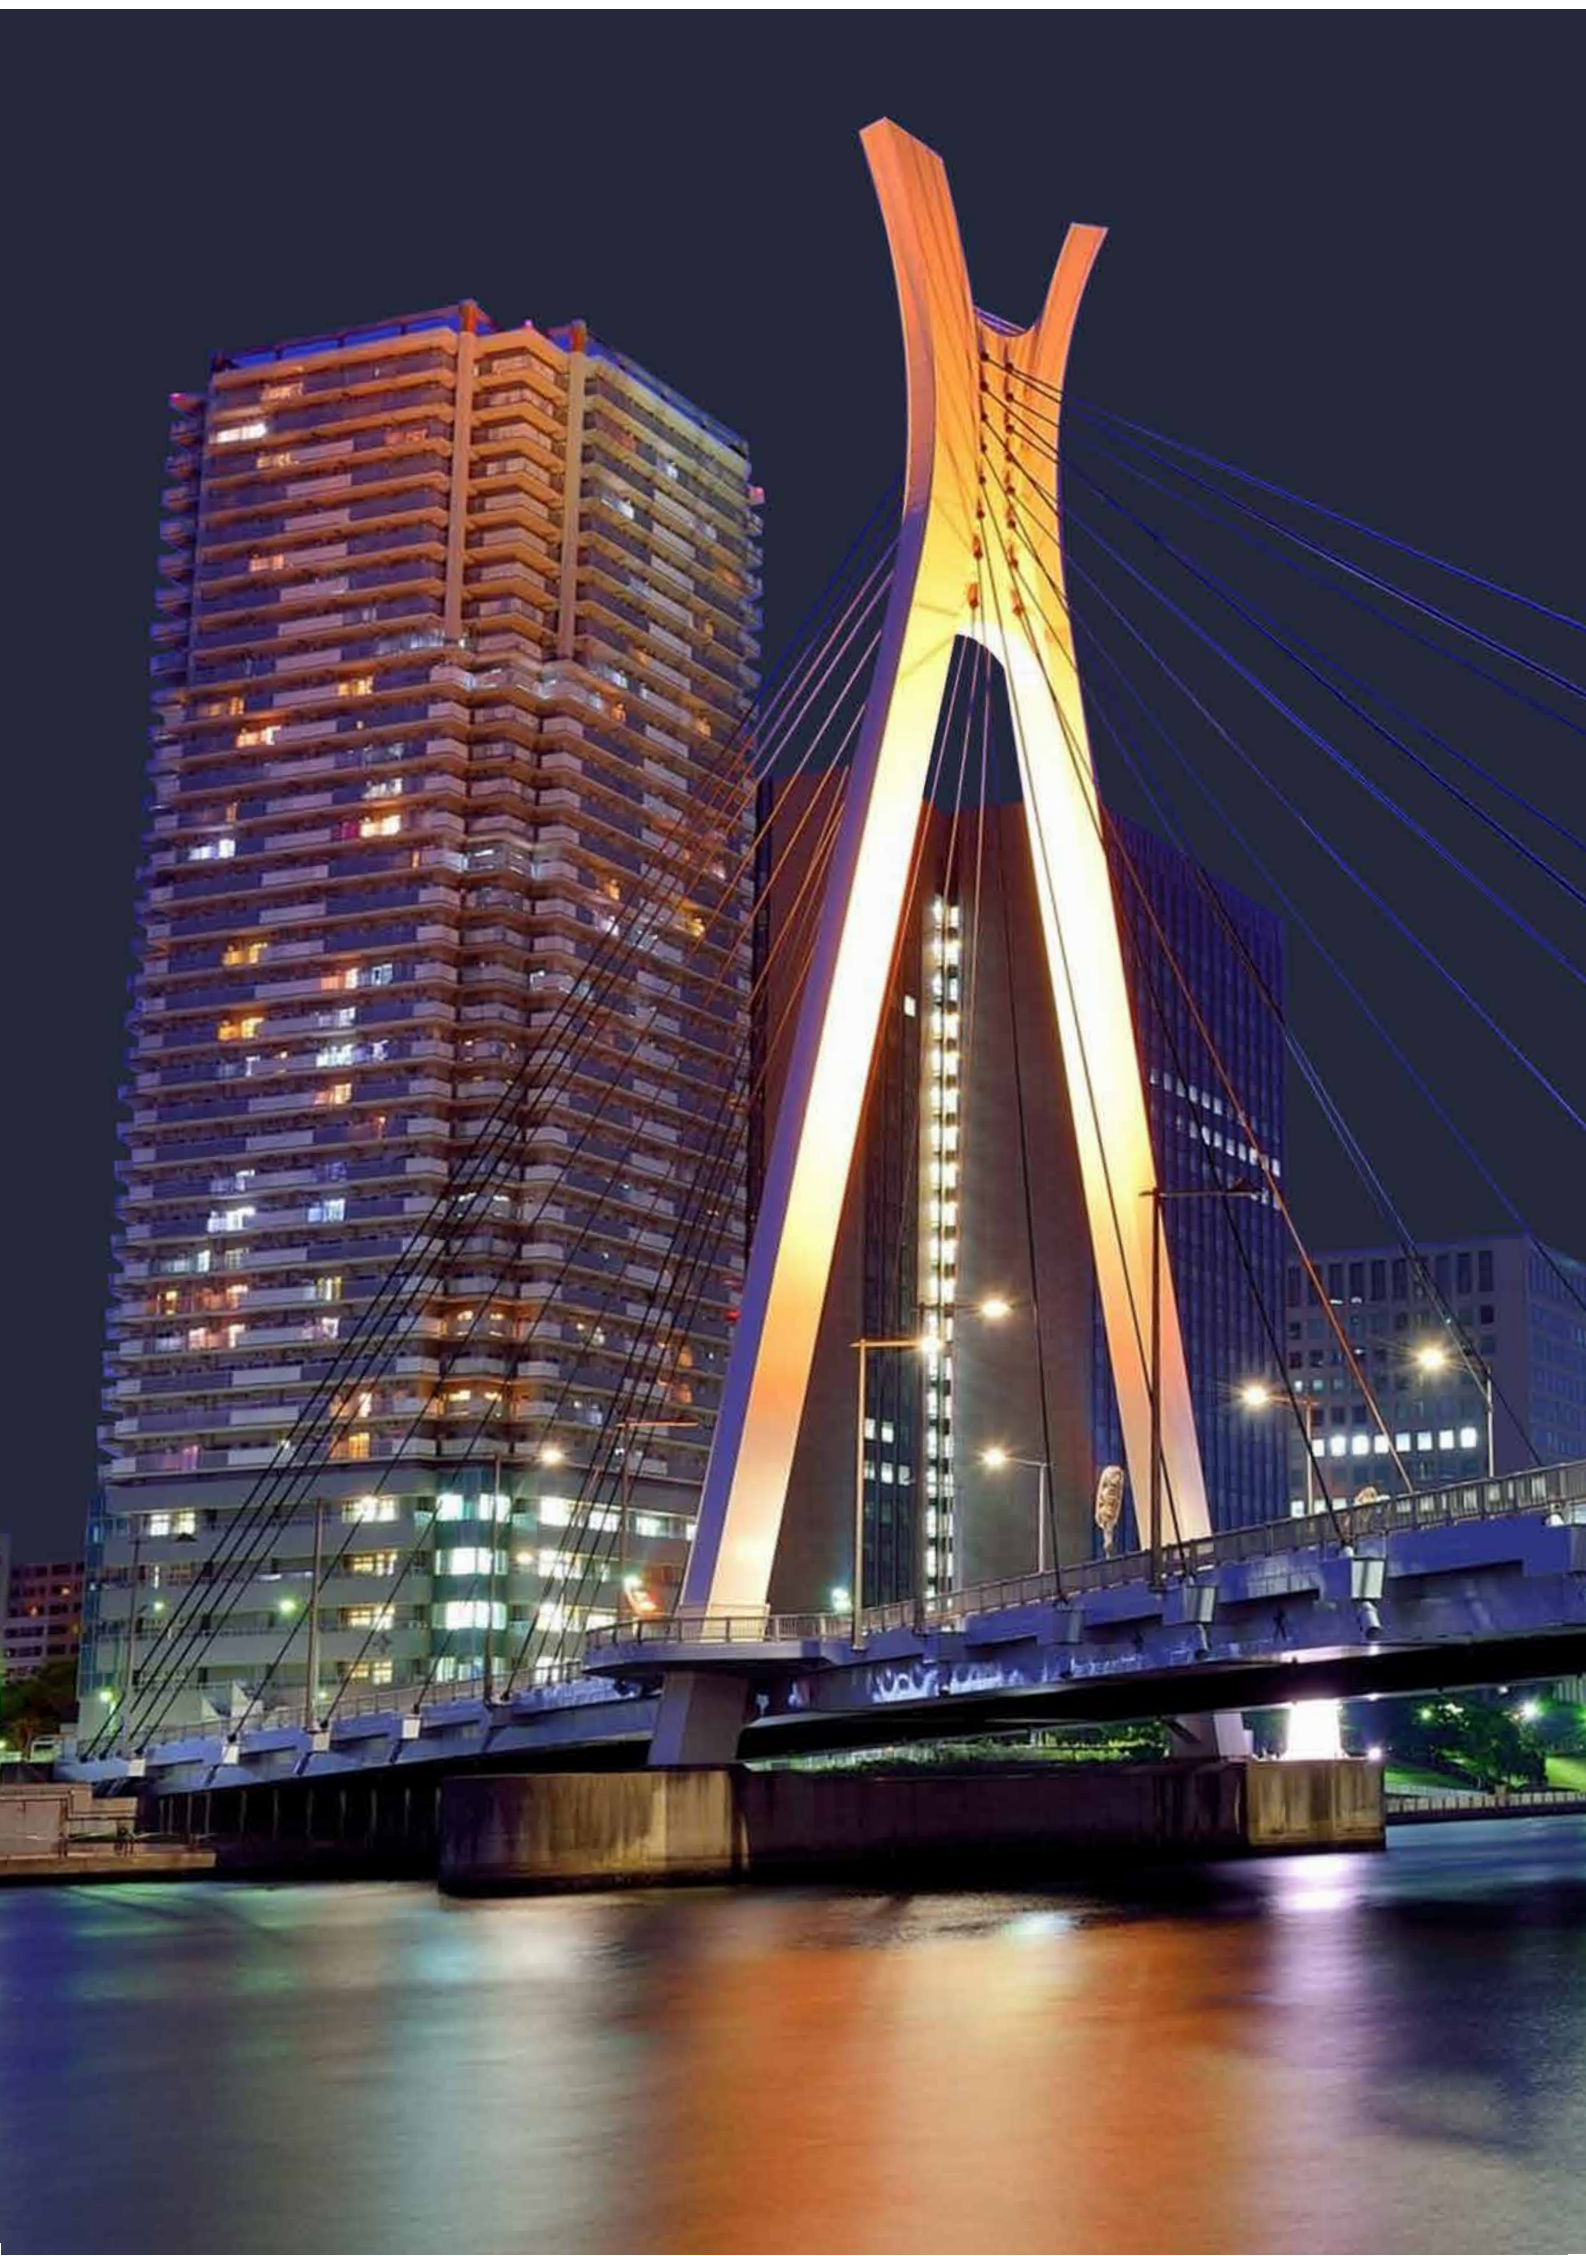

The Light of Magnificence



Waay 1




Waay 2

Bar Flood Light

Product Specification	
Product Category	Bar Flood Light
Product Name	Waay 1
Wattage	50W-100W
CCT	3000K/4000K/6000K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	30°, 60° , 90°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-casted
Body Colour	Silver/Black Anodizing
Product Code	GM-FC-BR-50-2200K / GM-FC-BR-100-2200K
	GM-FC-BR-50-6000K / GM-FC-BR-100-6000K
	GM-FC-BR-50-RGB / GM-FC-BR-100-RGB
Product Size	(L) 360 x (W) 95 x (H) 95mm

Product Specification	
Product Category	Bar Flood Light
Product Name	Waay 2
Wattage	150W-200W
CCT	3000K/4000K/6000K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	30°, 60° , 90°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-casted
Body Colour	Black Anodizing
Product Code	GM-FC-BR-150-2200K / GM-FC-BR-200-2200K
	GM-FC-BR-150-6000K / GM-FC-BR-200-2200K
	GM-FC-BR-150-RGB / GM-FC-BR-200-RGB
Product Size	(L) 360 x (W) 200x (H) 300mm

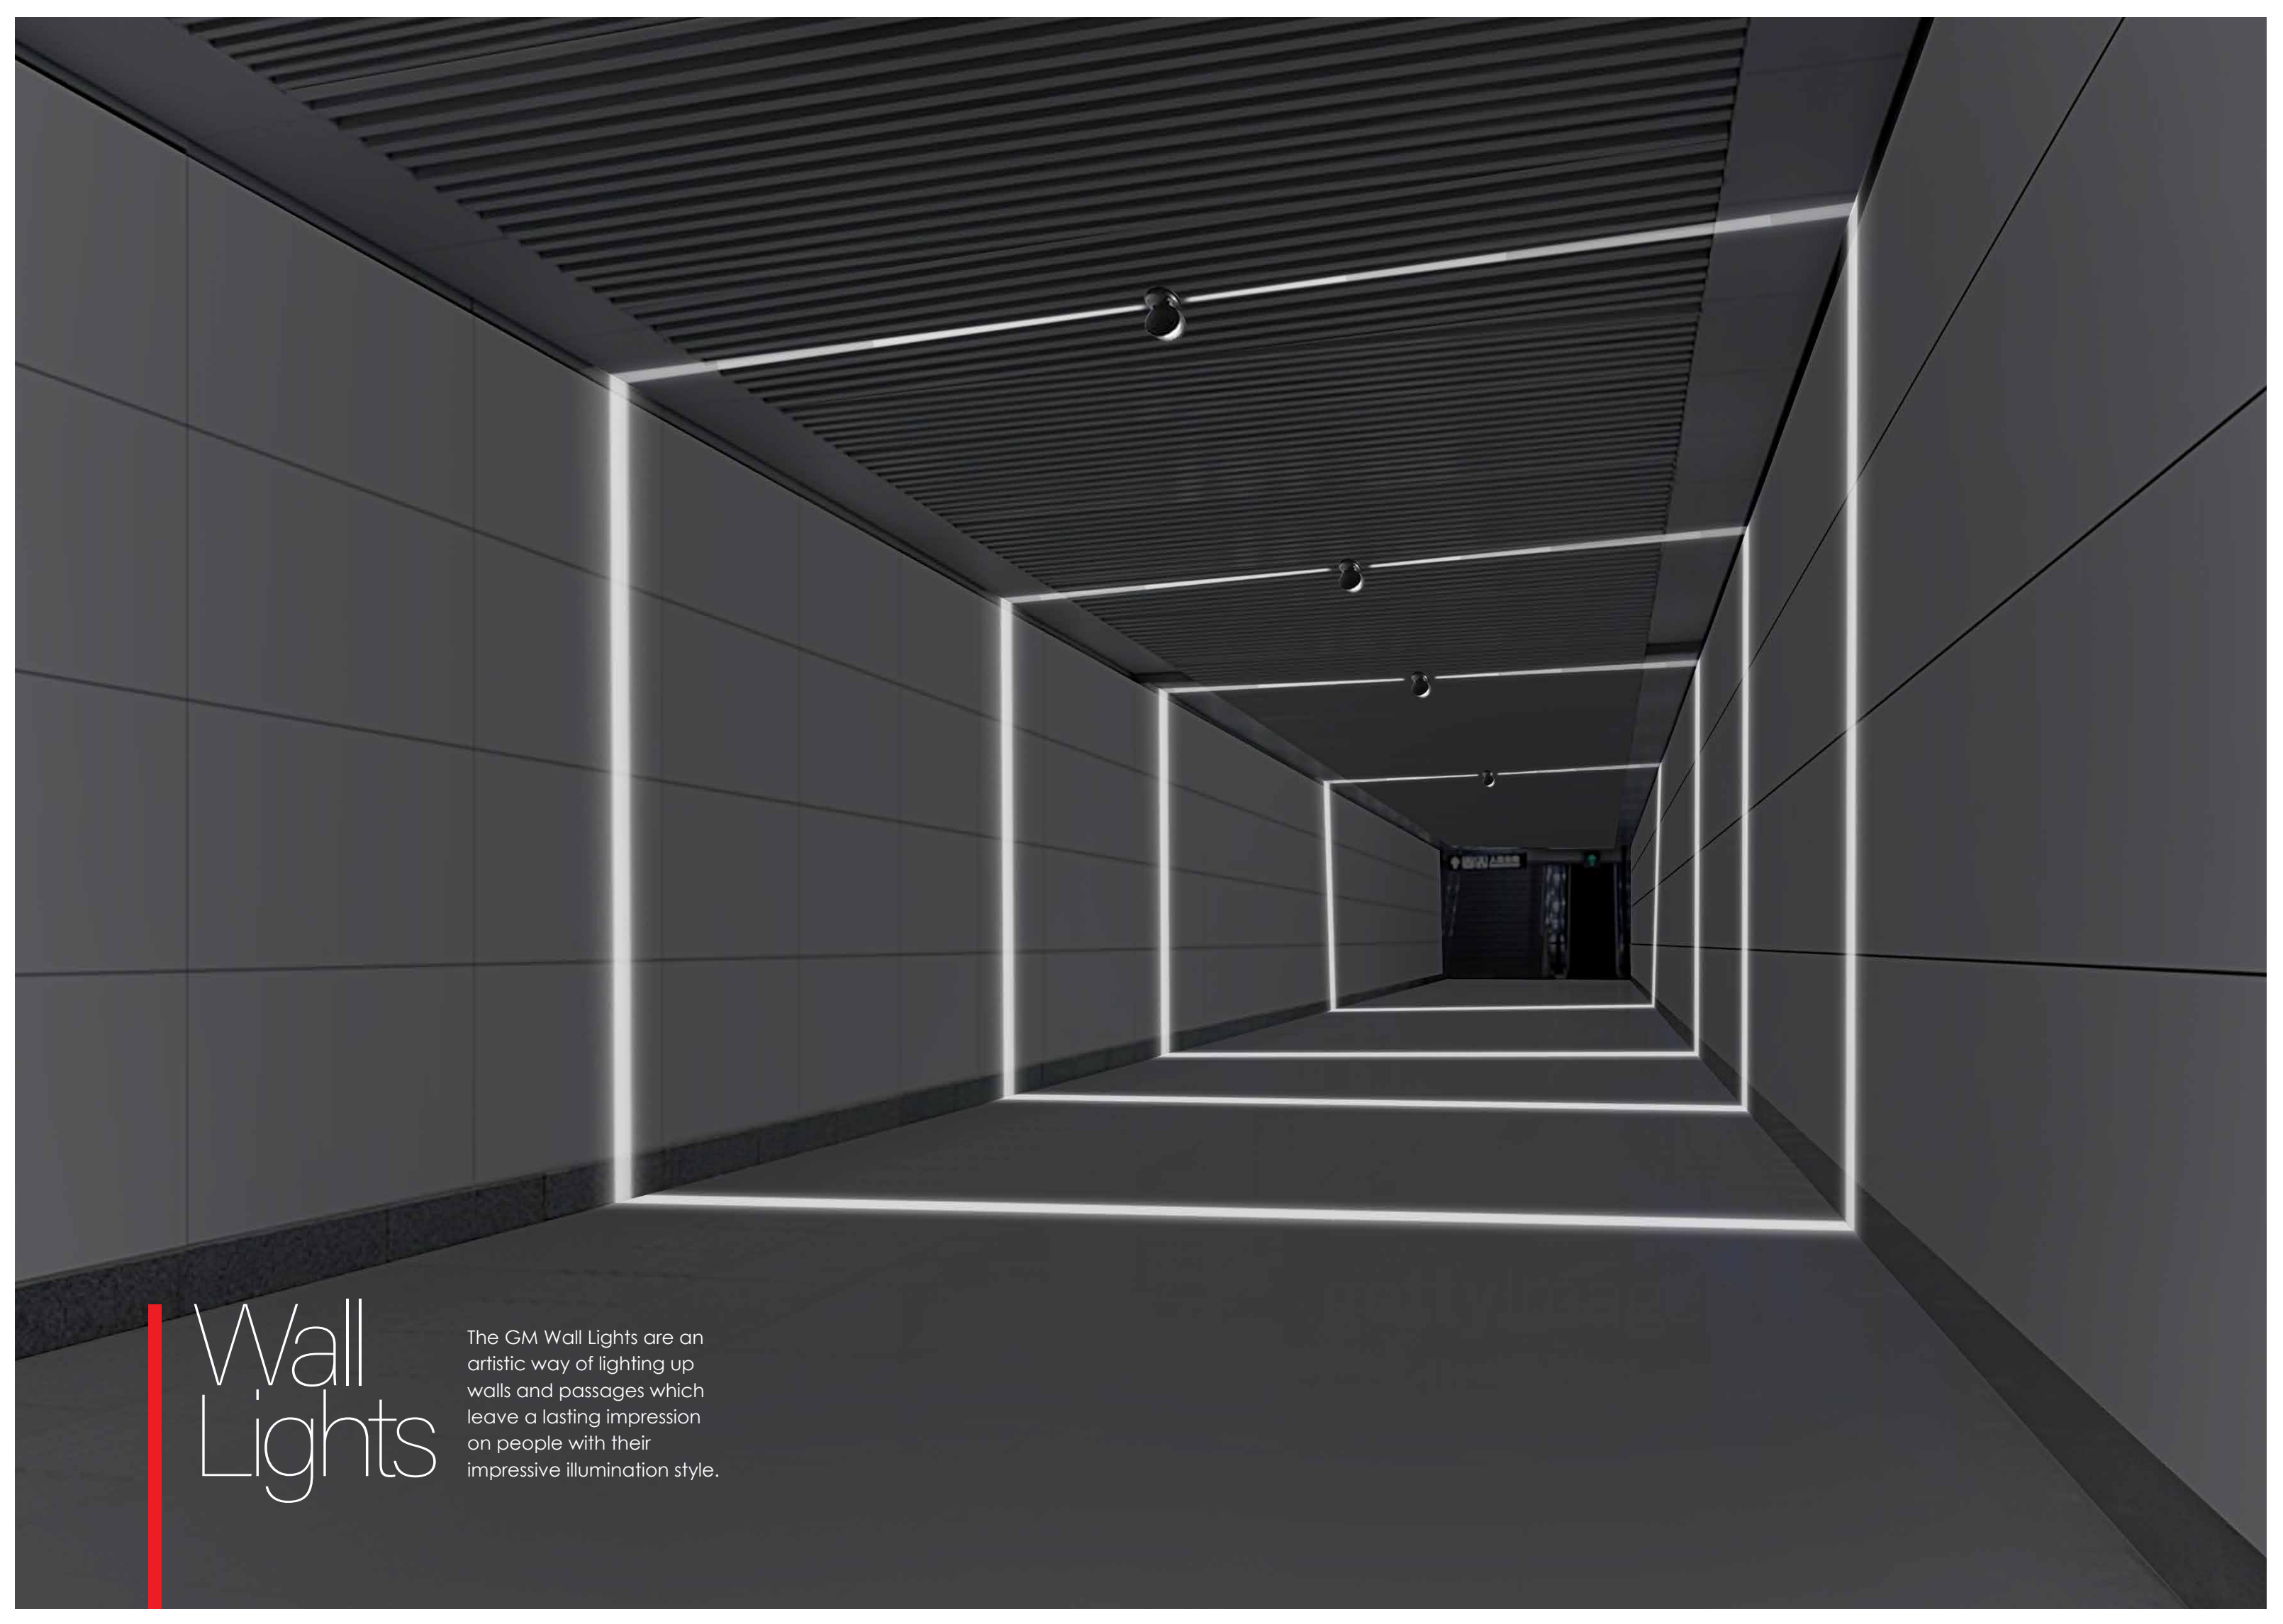

Wall Lights


The GM Wall Lights are an artistic way of lighting up walls and passages which leave a lasting impression on people with their impressive illumination style.

Illusion and Illumination



Rayo 1

Wall Lights

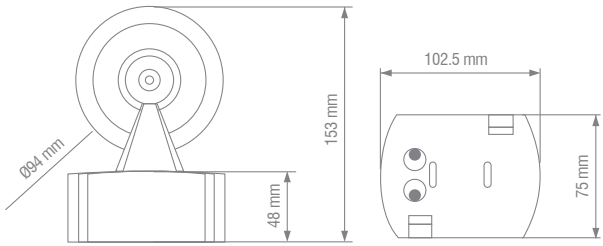


Product Specification	
Product Category	Wall Lights
Product Name	Rayo 1
Wattage	10W / 15W
CCT	3000-6500K
Protection Rating	IP66
Power Factor	>0.90
CRI	80
Beam Angle	5°~360°
Power Input	DC 24V
Housing	Aluminium Die-casted
Ambient Temperature	-20°C~45°C
Body Colour	White / Grey
Product Code	GM-FC-FR-10-4WY-3000K / 6500K
	GM-FC-FR-15-4WY-3000K / 6500K

Linear Luminosity



Rayo 2

Wall Lights

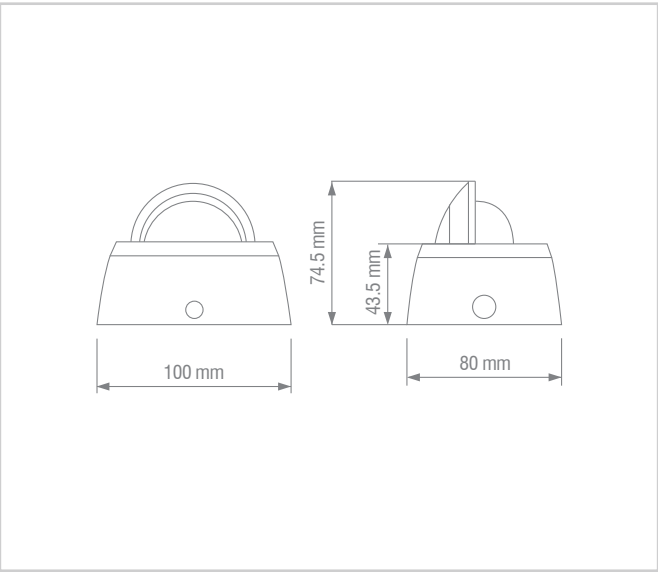

Product Specification	
Product Category	Wall Lights
Product Name	Rayo 2
Wattage	7W / 20W
CCT	3000-6000K
Protection Rating	IP66
Power Factor	>0.90
CRI	80
Beam Angle	20°~100°
Power Input	DC 24V
Housing	Aluminium Die-casted
Ambient Temperature	-20°C~45°C
Body Colour	White / Grey
Product Code	GM-FC-FR-7-2WY-3000K / 6000K
	GM-FC-FR-20-2WY-3000K / 6000K

GOBO Lights

The GM GOBO Lights are one-of-a-kind and add a beautiful shine to the sky with their powerful illumination. A stylish and convenient choice to light up a facade, these lights impart an artistic glow to the outdoors.



Your Ideas through Light



GOBO P1

GOBO Projector

Product Specification	
Product Code	GOBO Projector
Product Name	GOBO P1
Product Code	GM-FC-GP-ST-400-7500K
Wattage	400W
CCT	7500K
Protection Rating	IP67
Control	DMX 512
Beam Angle	9° ~ 46°
GOBO Holders	4 Holders
Housing	Aluminium Die-casted
Power Input	DC 24V
Lamp Life	>40,000 Hours
Body Colour	Black
Ambient Temperature	-20°C ~ 45°C
Connectors	Power & DMX
Product Size	(L) 407 x (W) 178 x (H) 265mm

Focus : Zoom In / Zoom Out
Effect : Overlap / Active Flow / Waving effect
Remote : Focusing / Rotate / Static
GOBO : Full Colour Lens

The Illumination that Defines the Occasion



GOBO P2



GOBO P3

GOBO Projector

Product Specification	
Product Category	GOBO Projector
Product Name	GOBO P2
Product Code	GM-FC-GP-RG-XX-7500K
Wattage	35W & 60W / 100W
CCT	7500K
Protection Rating	IP44 / IP 67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 243x (W) 178 X (H) 145mm

Product Specification	
Product Category	GOBO Projector
Product Name	GOBO P3
Product Code	GM-FC-GP-DY-XX-7500K
Wattage	35W / 50W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 240 x (W) 130 X (H) 200mm

*WATTAGE:XX

Beautiful Pathways for Beautiful Journeys



GOBO P4



GOBO P5



GOBO P6

GOBO Projector

Product Specification	
Product Category	GOBO Projector
Product Name	GOBO P4
Product Code	GM-FC-GP-DY1-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 240 x (W) 130 X (H) 200mm

Product Specification	
Product Code	GOBO Projector
Product Code	GOBO P5
Product Code	GM-FC-GP-DV2-XX-7500K
Wattage	100W/150W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 240 x (W) 130 X (H) 200mm

Product Specification	
Product Code	GOBO Projector
Product Code	GOBO P6
Product Code	GM-FC-GP-DY3-XX-7500K
Wattage	100W/160W/200W/300W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°, 25°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 390 x (W) 216 X (H) 342mm

*WATTAGE:XX

Walk through a Wave of Watery Illusion



GOBO P7



GOBO P8



GOBO P9

GOBO Projector

Product Specification	
Product Category	GOBO Projector
Product Name	GOBO P7
Product Code	GM-FC-GP-WV-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 240 x (W) 130 X (H) 200mm

Product Specification	
Product Code	GOBO Projector
Product Code	GOBO P8
Product Code	GM-FC-GP-WV1-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 240 x (W) 130 X (H) 200mm

Product Specification	
Product Code	GOBO Projector
Product Code	GOBO P9
Product Code	GM-FC-GP-WV2-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz
Product Size	(L) 400 x (W) 178 X (H) 265mm

*WATTAGE:XX

Interactive Projectors

The Interactive Projectors are a creative choice to bring your ideas alive and project them on a facade.



Project What's on Your Mind

The Ground Interactive Projection System uses dynamic projection to facilitate real-time interaction between the participants and the images on the ground, thereby allowing multiple participants to blend into the scene and participate in the game at the same time. The physical movements of the audience control the projection on the ground through the sensing equipment. The projection equipment suspended on the top is used to project the image effect to the ground. When the visitor walks to the projection area, it is recognised by the system. Participants can directly use their feet to interact with the virtual scene on the screen, and various interactive effects change according to the steps.



Interactive Projector

Product Specification		
Product Category	Interactive Projector	
Product Name	Digi 1	
Product Code	GM-FC-IPRJ-BLK	
Normal Floor Projection		
	Less content	×
	Limited projection screen size	×
	Supports up to dual radar	×
	Interactive effects speed are slow	×
	Copy idea	×
	Lack of core technology	×
	1080P Capped	×
	Mixed games of varying quality	×
	Only support projection devices	×
	Does not support multiple LED	×
	interactive sensing interface docking	×
	Unprofessional service guidance	×
	use traditional 2DFLASH game effect	×

Interactive Floor Projection Advantage		
	80 interactive game themse with rich scenes	✓
	Combined screen projection, you can spell it any way	✓
	The only company in the industry that can detect with 8 cameras	✓
	Point-to-point docking, virtual simulation technology	✓
	The founder of multi-channel ground interaction	✓
	The developer of ground interactive projection High precision, true 4K	✓
	Support both projector and LED hardware	✓
	Can be connected to LED sensor interface	✓
	Perfect after-sales service and installation instructions	✓
	Use the interactive screen developed by professional 3D game engine, fantastic and dynamic	✓

Blooming Projections Made Beautiful



Digi 2

Interactive Projector

Product Specification		
Product Category	Interactive Projector	
Product Name	Digi 2	
Product Code	GM-FC-IPRJ-WH	
Floor Projection Advantage		
	Less content	×
	Limited projection screen size	×
	Supports up to dual radar	×
	Interactive effects speed are slow	×
	Copy idea	×
	Lack of core technology	×
	4K Capped	×
	Mixed games of varying quality	×
	Only support projection devices	×
	Does not support multiple LED	×
	interactive sensing interface docking	×
	Unprofessional service guidance	×
	use traditional 2DFLASH game effect	×

Interactive Floor Projection Advantage		
	80 interactive game themse with rich scenes	✓
	Combined screen projection, you can spell it any way	✓
	The only company in the industry that can detect with 8 cameras	✓
	Point-to-point docking, virtual simulation technology	✓
	The founder of multi-channel ground interaction	✓
	The developer of ground interactive projection	✓
	High precision, true 8K	✓
	Support both projector and LED hardware	✓
	Can be connected to LED sensor interface	✓
	Perfect after-sales service and installation instructions	✓
	Use the interactive screen developed by professional 3D game engine, fantastic and dynamic	✓

Fan Projection Lights


The GM Fan Projection Light are a futuristic feat in creating lifelike holograms through simple yet mesmerising lighting technique. The projection luminaire can be used for educational and commercial purposes.



Watch Playful Projections Come Alive




Interactive Projector

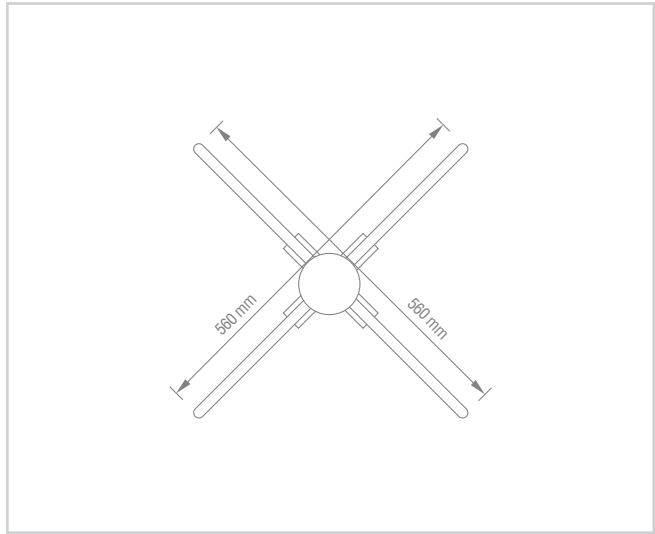


Product Specification	
Product Category	Projection Fans
Product Name	Sudo 1
Product Code	GM-FC-FN-56-RGB
Size	56cm
Colour	RGB
Brightness	1600 CD
Control	Remote / Wi-Fi
Native Resolution	1600 x 672
Memory Size	8GB
Power Input	AC 110V-240V, 50 Hz
Lamp Life	50000 Hours
Colour	Black
Connectors	Power In-out

3D Content Library
Accessories For Outdoor / Indoor

Projecting Mesmerising Magic

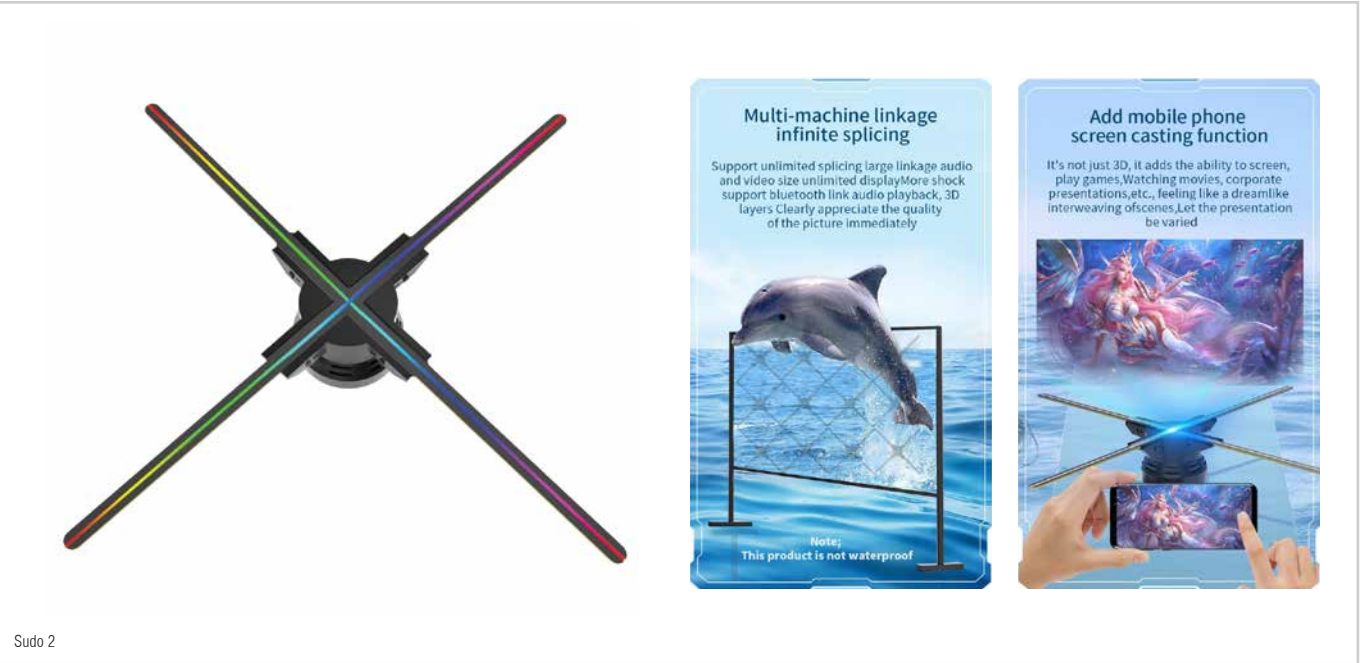

Interactive Projector

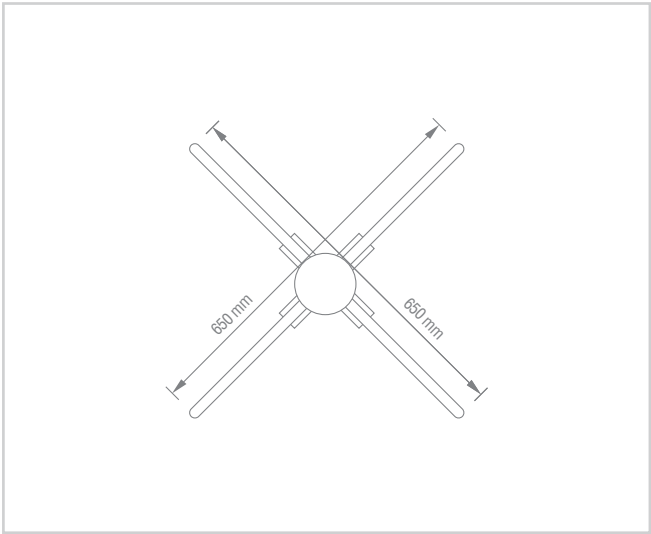

Product Specification	
Product Category	Projection Fans
Product Name	Sudo 2
Product Code	GM-FC-FN-65-RGB
Size	65cm
Colour	RGB
Brightness	1600 CD
Control	Remote / Wi-Fi
Native Resolution	1600x720
Memory Size	8GB
Power Input	AC 110V-240, 50 Hz
Lamp Life	50000 Hours
Colour	Black
Connectors	Power In-out

3D Content Library
Accessories For Outdoor / Indoor



Inground Lights

The GM Inground Lights are sturdy in design and exceptional in their quality to illuminate the facade and outdoors. With a cluster of powerful LEDs and the ability to withstand all weather conditions, this light is perfect to light up spaces beautifully.



Bright and Beaming

The fixture has a stainless steel body and surface, and is covered with tempered glass. Additionally, the ABS underground plastic case (optional) is suitable for swimming pools, parks, pedestrian streets, statues, etc. Control Mode: Single Control/Multicolour External Control/DMX512 Internal Control.



Inground Light

Product Specification		Product Specification		Product Specification		Product Specification	
Product Category	Inground Light	Product Category	Inground Light	Product Category	Inground Light	Product Category	Inground Light
Product Name	Illum 1	Product Name	Illum 2	Product Name	Illum 3	Product Name	Illum 4
Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX
Wattage	1x1W	Wattage	3x1W / 3x1W RGB	Wattage	5x1W	Wattage	6x1W / 6x1W 2R 2G 2B
CCT	3000K	CCT	3000K / RGB	CCT	3000K	CCT	3000 / RGB
Beam Angle	35°	Beam Angle	35°	Beam Angle	35°	Beam Angle	35°
CRI	80	CRI	80	CRI	80	CRI	80
Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68
Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V

* Wattage: XX
CCT: XXXX




Lights that are Simply Vibrant






Inground Light

Product Specification		Product Specification		Product Specification		Product Specification	
Product Category	Inground Light	Product Category	Inground Light	Product Category	Inground Light	Product Category	Inground Light
Product Name	Illum 5	Product Name	Illum 6	Product Name	Illum 7	Product Name	Illum 8
Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX	Product Code	GM-FC-ING-XX-XXXX
Wattage	9x1W 3R 3G 3B	Wattage	12x1W 4R 4G 4B	Wattage	15x1W 5R 5G 5B	Wattage	18x1W 6R 6G 6B
CCT	3000K / RGB	CCT	3000K / RGB	CCT	3000K / RGB	CCT	3000K / RGB
Beam Angle	35°	Beam Angle	35°	Beam Angle	35°	Beam Angle	35°
CRI	80	CRI	80	CRI	80	CRI	80
Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68
Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V

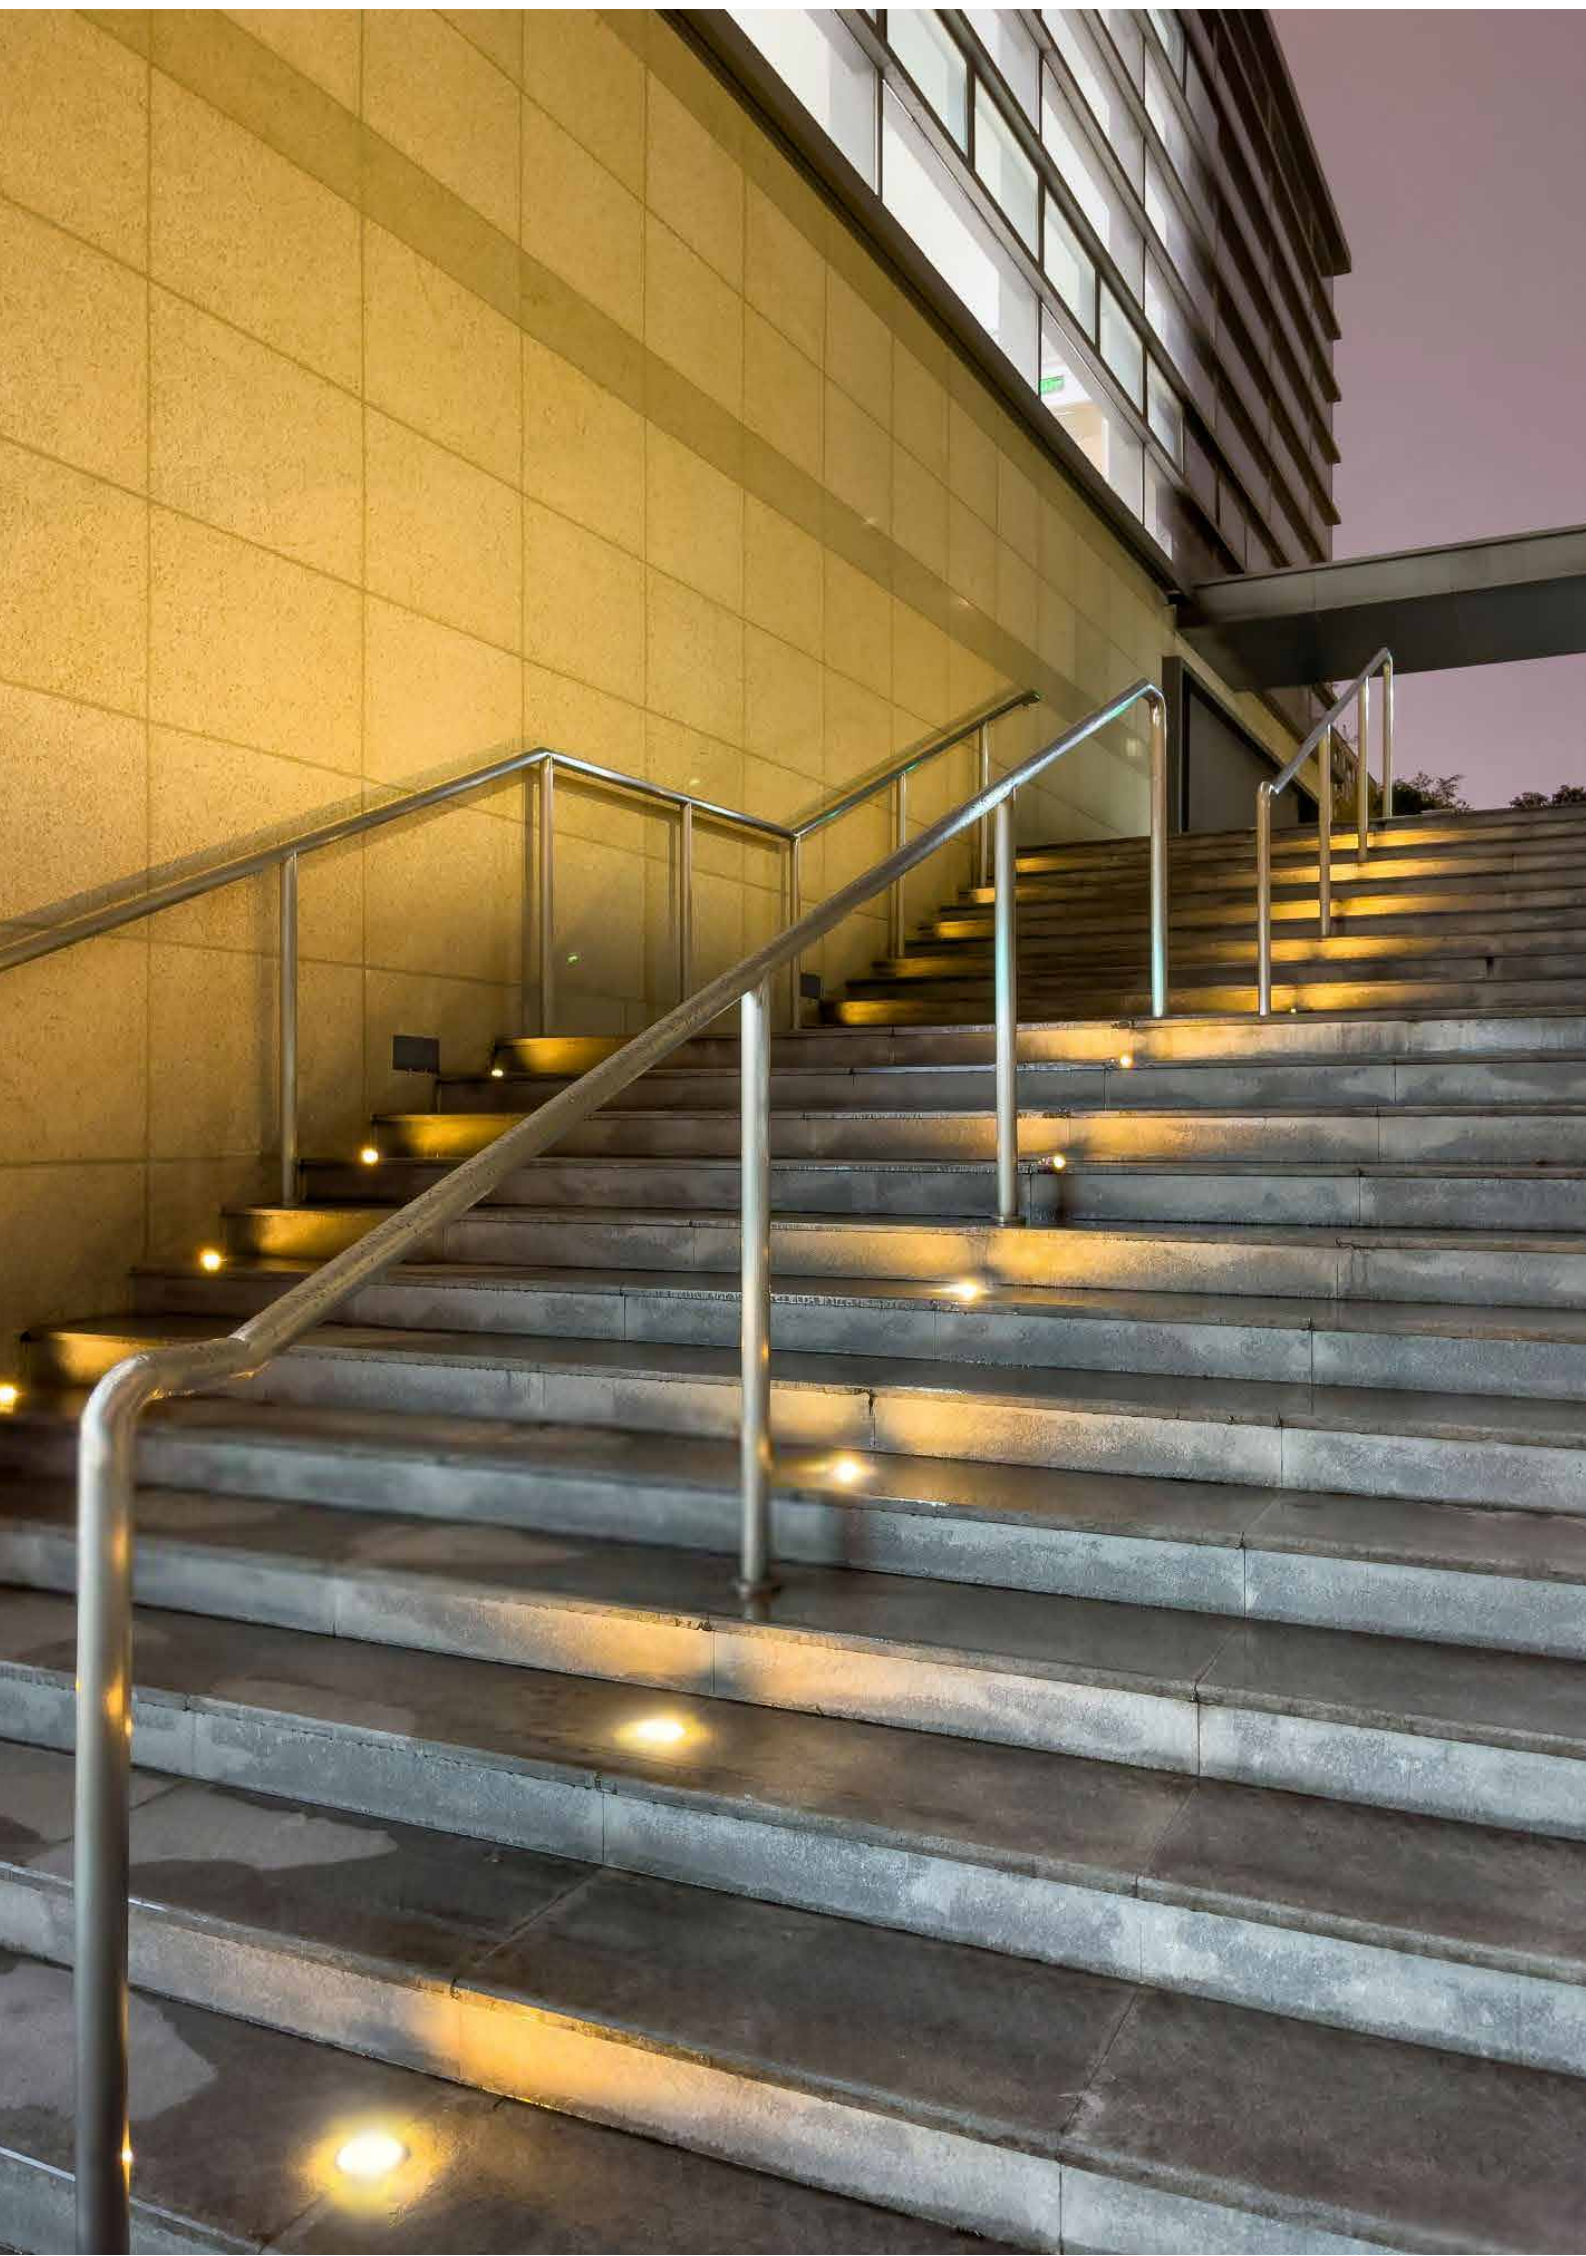

In Sync with the Night

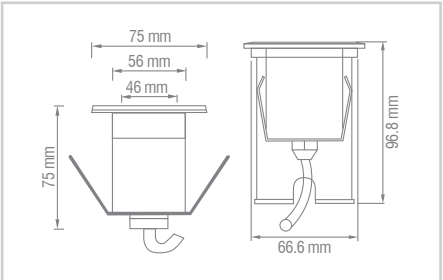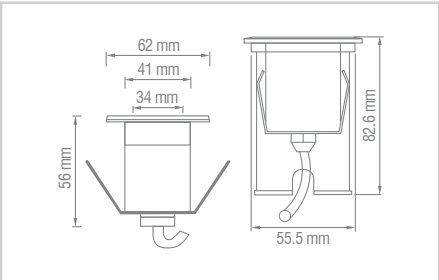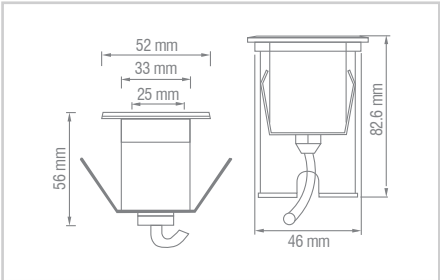

Inground Light

Product Specification	
Product Category	Inground Light
Product Name	Illum S1
Product Code	GM-FC-ING1-1-3000K
Wattage	1x1W
CCT	3000K
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Product Specification	
Product Category	Inground Light
Product Name	Illum S2
Product Code	GM-FC-ING1-3-RGB
Wattage	1x3W (RGB)
CCT	3000K / RGB
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V


Product Specification	
Product Category	Inground Light
Product Name	Illum S3
Product Code	GM-FC-ING2-3-RGB
Wattage	3x1W (DMX)
CCT	3000K / RGB
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Fountain Lights

The GM Fountain Lights add a colourful magic to water sprouts that make them an attractive sight to behold and appreciate.



The Art of Fluid Lighting

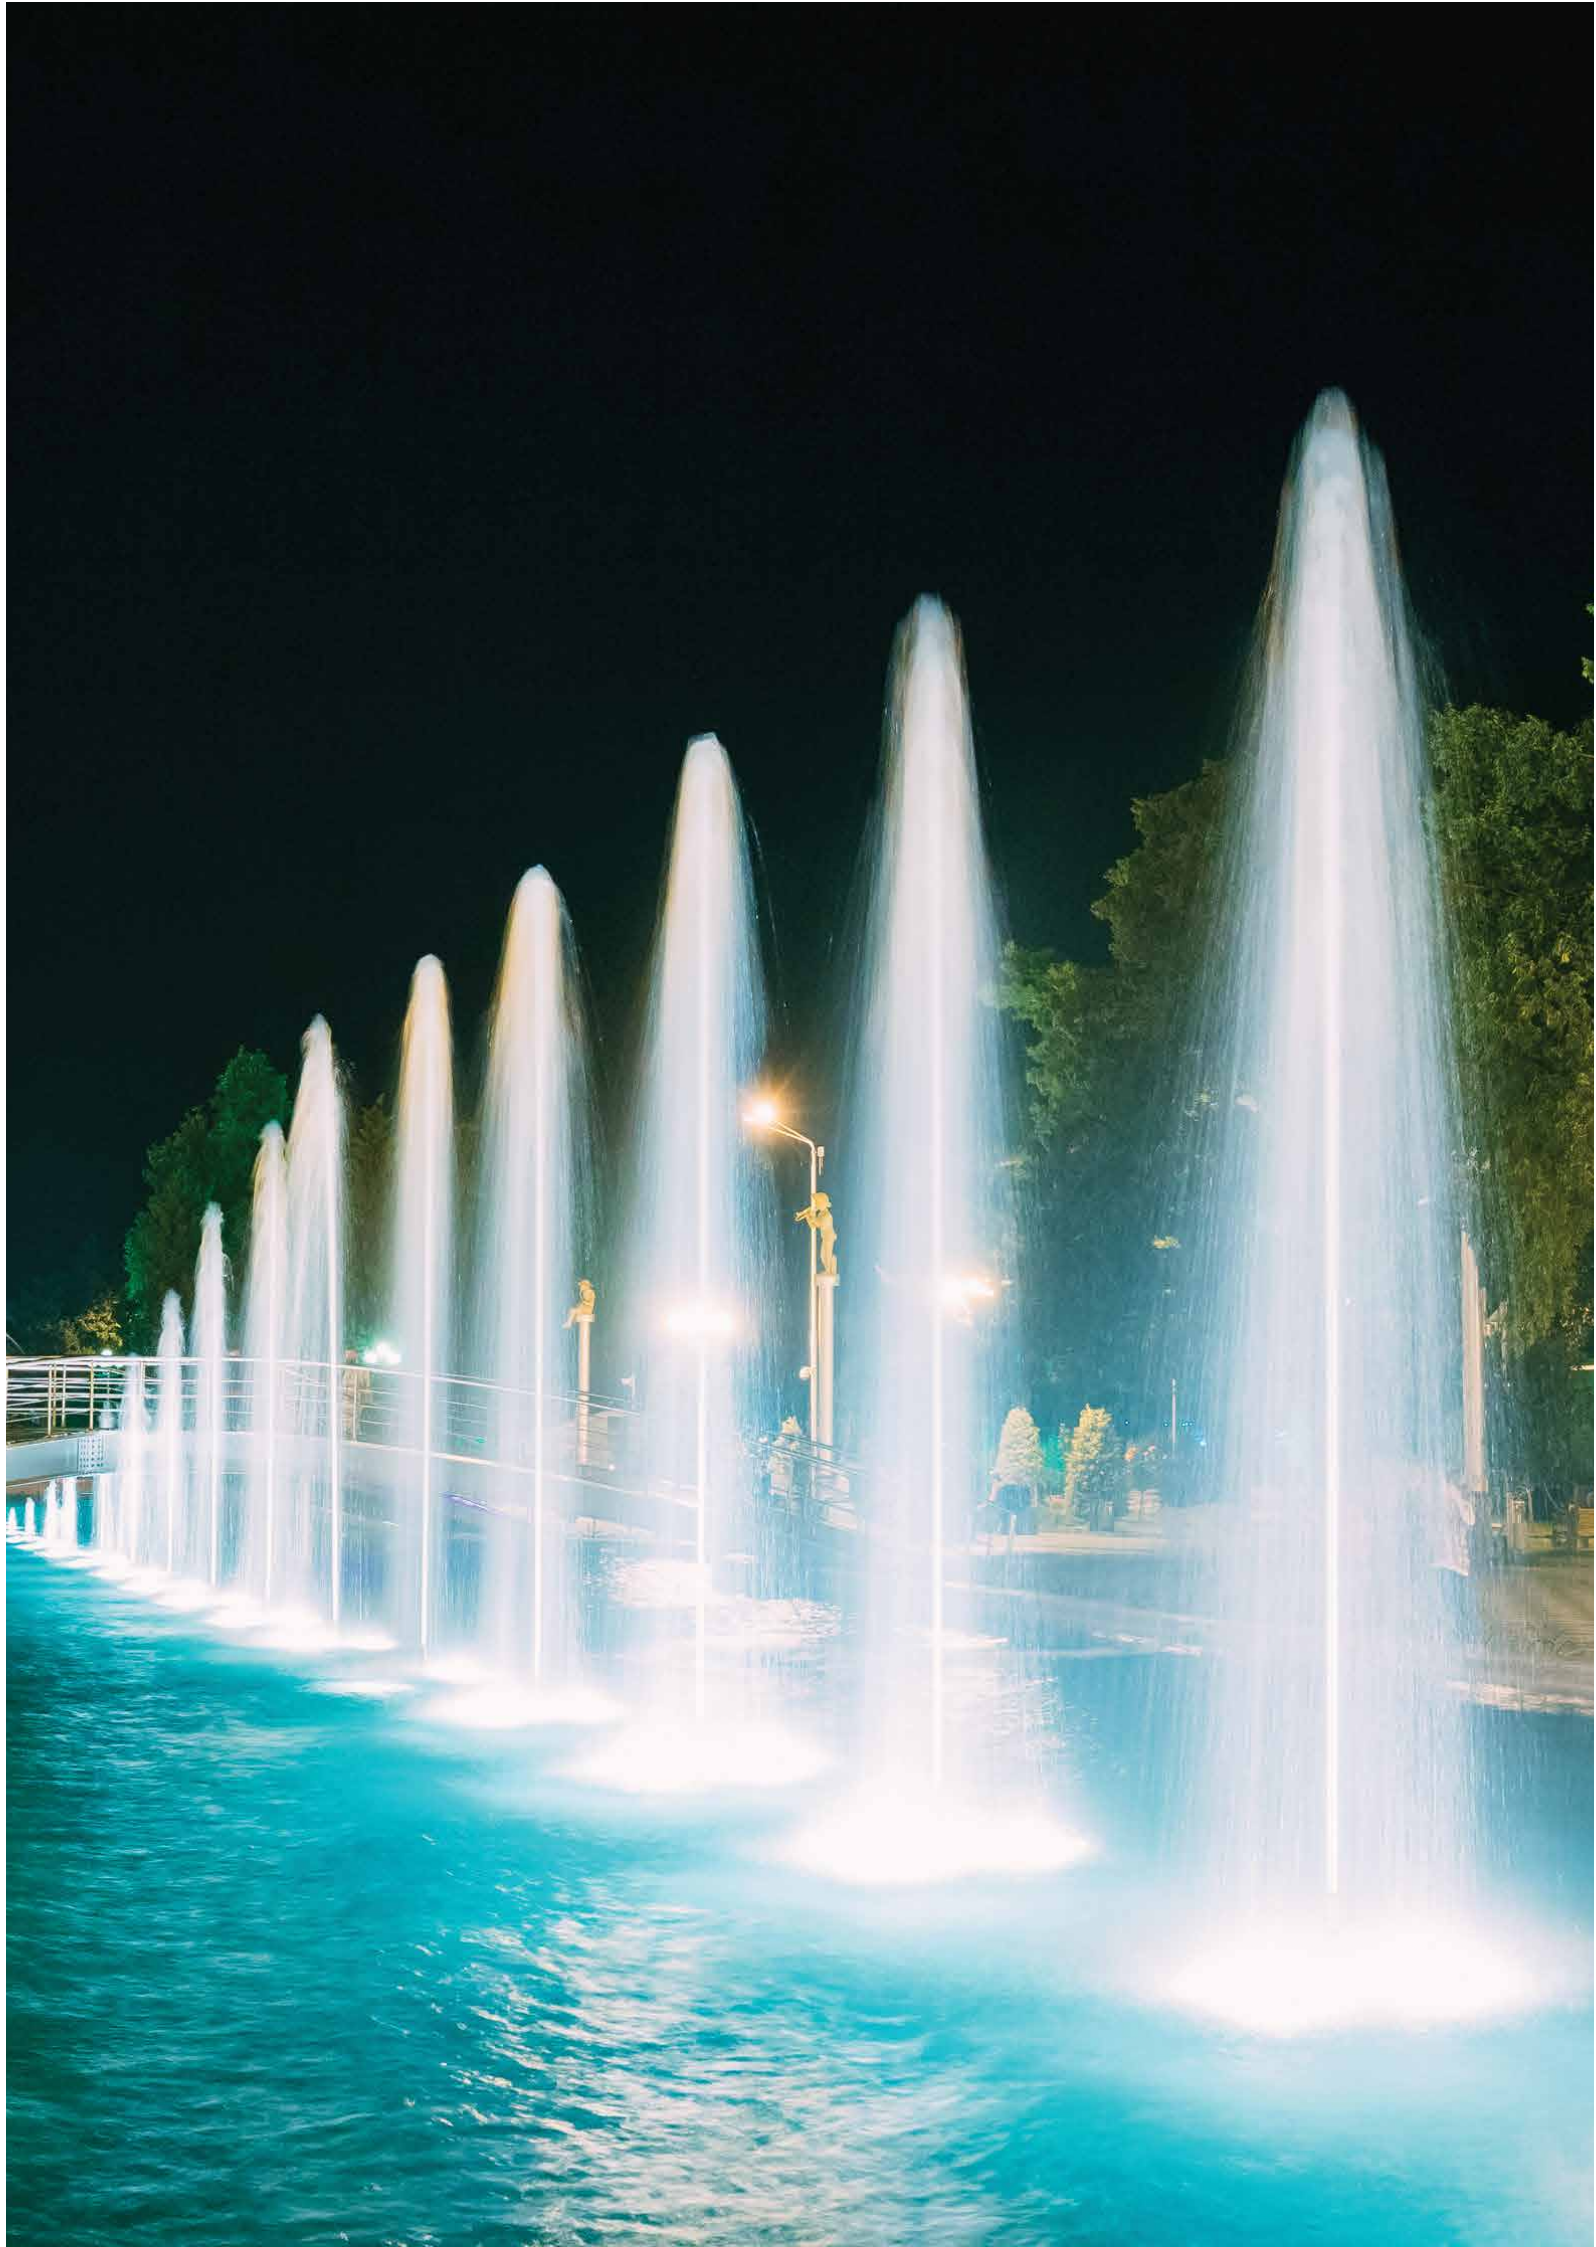

Nozo 1



Nozo 2



Nozo 3

Fountain Lights

Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 1
Product Code	GM-FC-NZ-TY-1
Nozzle Type	Black foam jet with ball joint
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø60 x (H) 155mm

Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 2
Product Code	GM-FC-NZ-TY-2
Nozzle Type	Cascade jet nozzle
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø60 x (H) 155mm

Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 3
Product Code	GM-FC-NZ-TY-3
Nozzle Type	Umbrella nozzle (mushroom/ bell)
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø60 x (H) 210mm

Varied Styles of Fluidity



Nozo 4



Nozo 5



Nozo 6

Fountain Lights

Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 4
Product Code	GM-FC-NZ-TY-4
Nozzle Type	Black foam jet with ball joint
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø60 x (H) 210mm


Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 5
Product Code	GM-FC-NZ-TY-5
Nozzle Type	Cascade jet nozzle
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø60 x (H) 155mm

Product Specification	
Product Category	Fountain Lights
Product Name	Nozo 6
Product Code	GM-FC-NZ-TY-6
Nozzle Type	Umbrella nozzle (mushroom/ bell)
Power	As per pump (pressure) flow
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plating
Product Size	Ø125 x (H) 100mm



Sprout of Magical Lights

The cover has a PC material integrated lens, and the back has a 304 stainless steel lamp housing with rubber sealing. Suitable for water fixtures, fountain lights, pools and other underwater lighting. Control Mode: Single Control/Multicolour External Control/DMX512 Internal Control.

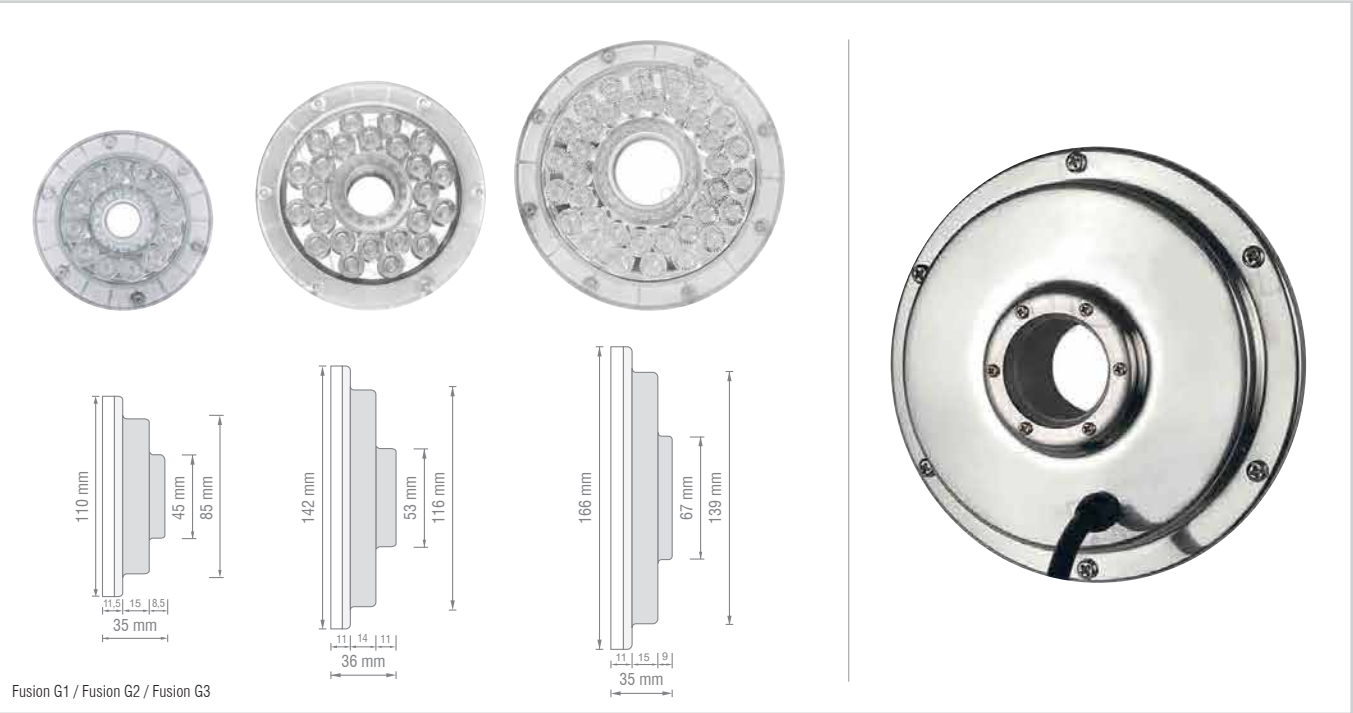

			
Voltage	220/240V	220/240V	220/240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Output	167mA	630mA	830mA

Product Specification	
Product Category	Fountain Lights
Product Name	Fusion G1
Product Code	GM-FC-NZ-3-XXXX
Joint	3/4"
Voltage	DC12V / DC24V
Wattage	3W
Lamp Beads	12
Colour	WW/RGB/RGBW
LIne Length	50CM
Size	Ø110x35mm
Protection Rating	IP68




Product Specification	
Product Category	Fountain Lights
Product Name	Fusion G2
Product Code	GM-FC-NZ-6-XXXX
Joint	1"
Voltage	DC12V / DC24V
Wattage	6W
Lamp Beads	24
Colour	WW/RGB/RGBW
LIne Length	50CM
Size	Ø142x35mm
Protection Rating	IP68

Product Specification	
Product Category	Fountain Lights
Product Name	Fusion G3
Product Code	GM-FC-NZ-9-XXXX
Joint	1½"
Voltage	DC12V / DC24V
Wattage	9W
Lamp Beads	36
Colour	WW/RGB/RGBW
LIne Length	50CM
Size	Ø166x35mm
Protection Rating	IP68

* CCT: XXXX

More Hues than Just Blues

Comes with a stainless steel body, silica gel sealing, and tempered glass. Suitable for water fixtures, dry fountain lights, pools and other underwater lighting.
Control Mode: Single Control/Multicolour External Control/DMX512 Internal Control.

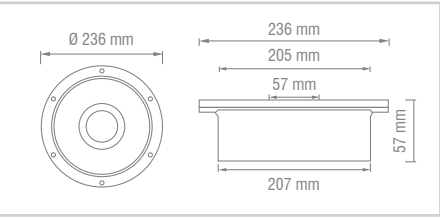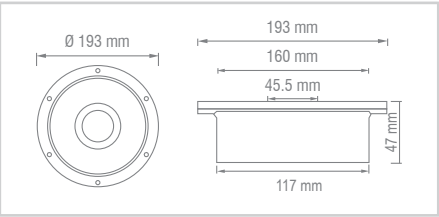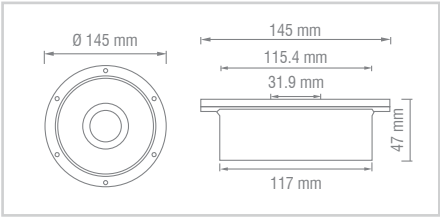

Fountain Lights

Product Specification		
Product Category: Fountain Lights	Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Fusion F1	Product Name: Fusion F2	Product Name: Fusion F3
GM-FC-NZ-9-BLK-XXXX	GM-FC-NZ-9-BLK-RGB	GM-FC-NZ-12-BLK-RGB
Wattage: 9x1W	Wattage: 9x1W (3R 3G 3B)	Wattage: 12x1W (4R 4G 4B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
Protection Rating: IP68	Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø145x47mm	Size: Ø145x47mm	Size: Ø145x47mm

Product Specification		
Product Category: Fountain Lights	Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Fusion F4	Product Name: Fusion F5	Product Name: Fusion F6
GM-FC-NZ-12-BLK-3000K	GM-FC-NZ1-12-BLK-RGB	GM-FC-NZ-15-BLK-RGB
Wattage: 12x1W	Wattage: 12x1W (4R 4G 4B)	Wattage: 15x1W (5R 5G 5B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
Protection Rating: IP68	Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø193x52mm	Size: Ø193x52mm	Size: Ø193x52mm

Product Specification		
Product Category: Fountain Lights	Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Fusion F7	Product Name: Fusion F8	Product Name: Fusion F9
GM-FC-NZ-15-BLK-3000K	GM-FC-NZ1-15-BLK-RGB	GM-FC-NZ-18-BLK-RGB
Wattage: 15x1W	Wattage: 15x1W (5R 5G 5B)	Wattage: 18x1W (6R 6G 6B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
Protection Rating: IP68	Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø232x57mm	Size: Ø232x57mm	Size: Ø232x57mm

* CCT: XXXX

Beautiful Nights with Prettier Lights



Fountain Lights


Product Specification		Product Specification		Product Specification	
Product Category: Fountain Lights	Product Category: Fountain Lights	Product Category	Fountain Lights	Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Visto 1	Product Name: Visto 2	Product Name	Visto 3	Product Name: Visto 4	Product Name: Visto 5
Product Code: GM-FC-FT-P1-3-3000K	Product Code: GM-FC-FT-P1-3-RGB	Product Code	GM-FC-FT-P1-5-3000K	Product Code: GM-FC-FT-P1-6-3000K	Product Code: GM-FC-FT-P1-6-RGB
Wattage: 3x1W	Wattage: 3x1W (1R 1G 1B)	Wattage	5x1W	Wattage: 6x1W	Wattage: 6x1W (2R 2G 2B)
CCT: 3000K	CCT: RGB	CCT	3000K	CCT: 3000K	CCT: RGB
Beam Angle: 35°	Beam Angle: 35°	Beam Angle	35°	Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS	Housing	SS	Housing: SS	Housing: SS
Protection Rating: IP68	Protection Rating: IP68	Protection Rating	IP68	Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage	DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V

Lighting That's Absolutely Majestic


Unique high-efficiency current technology to ensure stable operation of each LED. Lamp cup uses high-quality stainless steel housings for good heat dissipation, high water resistance, and protection class IP68. The light fixture offers energy-saving, environmental protection, low voltage, easy control, long life, along with high-quality waterproof connectors and other absolute advantages.




Visto 6 / Visto 7




Visto 8 / Visto 9



Visto 10 / Visto 11



Visto 12 / Visto 13



Fountain Lights


Product Specification	
Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Visto 6	Product Name: Visto 7
Product Code: GM-FC-FT-P1-9-3000K	Product Code: GM-FC-FT-P1-9-RGB
Wattage: 9x1W	Wattage: 9x1W (3R 3G 3B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Visto 8	Product Name: Visto 9
Product Code: GM-FC-FT-P1-12-3000K	Product Code: GM-FC-FT-P1-12-RGB
Wattage: 12x1W	Wattage: 12x1W (4R 4G 4B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Visto 10	Product Name: Visto 11
Product Code: GM-FC-FT-P1-15-3000K	Product Code: GM-FC-FT-P1-15-RGB
Wattage: 15x1W	Wattage: 15x1W (5R 5G 5B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V


Product Specification	
Product Category: Fountain Lights	Product Category: Fountain Lights
Product Name: Visto 12	Product Name: Visto 13
Product Code: GM-FC-FT-P1-18-3000K	Product Code: GM-FC-FT-P1-18-RGB
Wattage: 18x1W	Wattage: 18x1W (6R 6G 6B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
Protection Rating: IP68	Protection Rating: IP68
Voltage: DC12/24V	Voltage: DC12/24V

Command Scenic Lighting

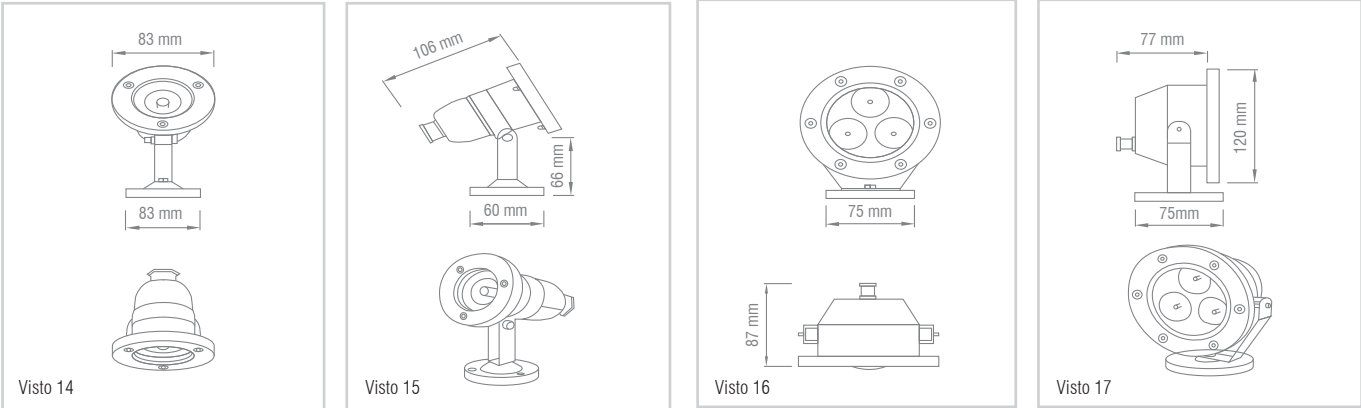

Fountain Lights


Product Specification		Product Specification		Product Specification		Product Specification	
Product Category	Fountain Lights	Product Category	Fountain Lights	Product Category	Fountain Lights	Product Category	Fountain Lights
Product Name	Visto 14	Product Name	Visto 15	Product Name	Visto 16	Product Name	Visto 17
Product Code	GM-FC-FT1-P1-3-3000K	Product Code	GM-FC-FT1-P1-3-RGB	Product Code	GM-FC-FT1-P1-6-3000K	Product Code	GM-FC-FT1-P1-6-RGB
Wattage	3x1W	Wattage	3x1W (1R 1G 1B)	Wattage	6x1W	Wattage	6x1W (2R 2G 2B)
Beam Angle	35°	Beam Angle	35°	Beam Angle:	35°	Beam Angle	35°
Housing	SS	Housing	SS	Housing	SS	Housing	SS
Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68	Protection Rating	IP68
Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V	Voltage	DC12/24V

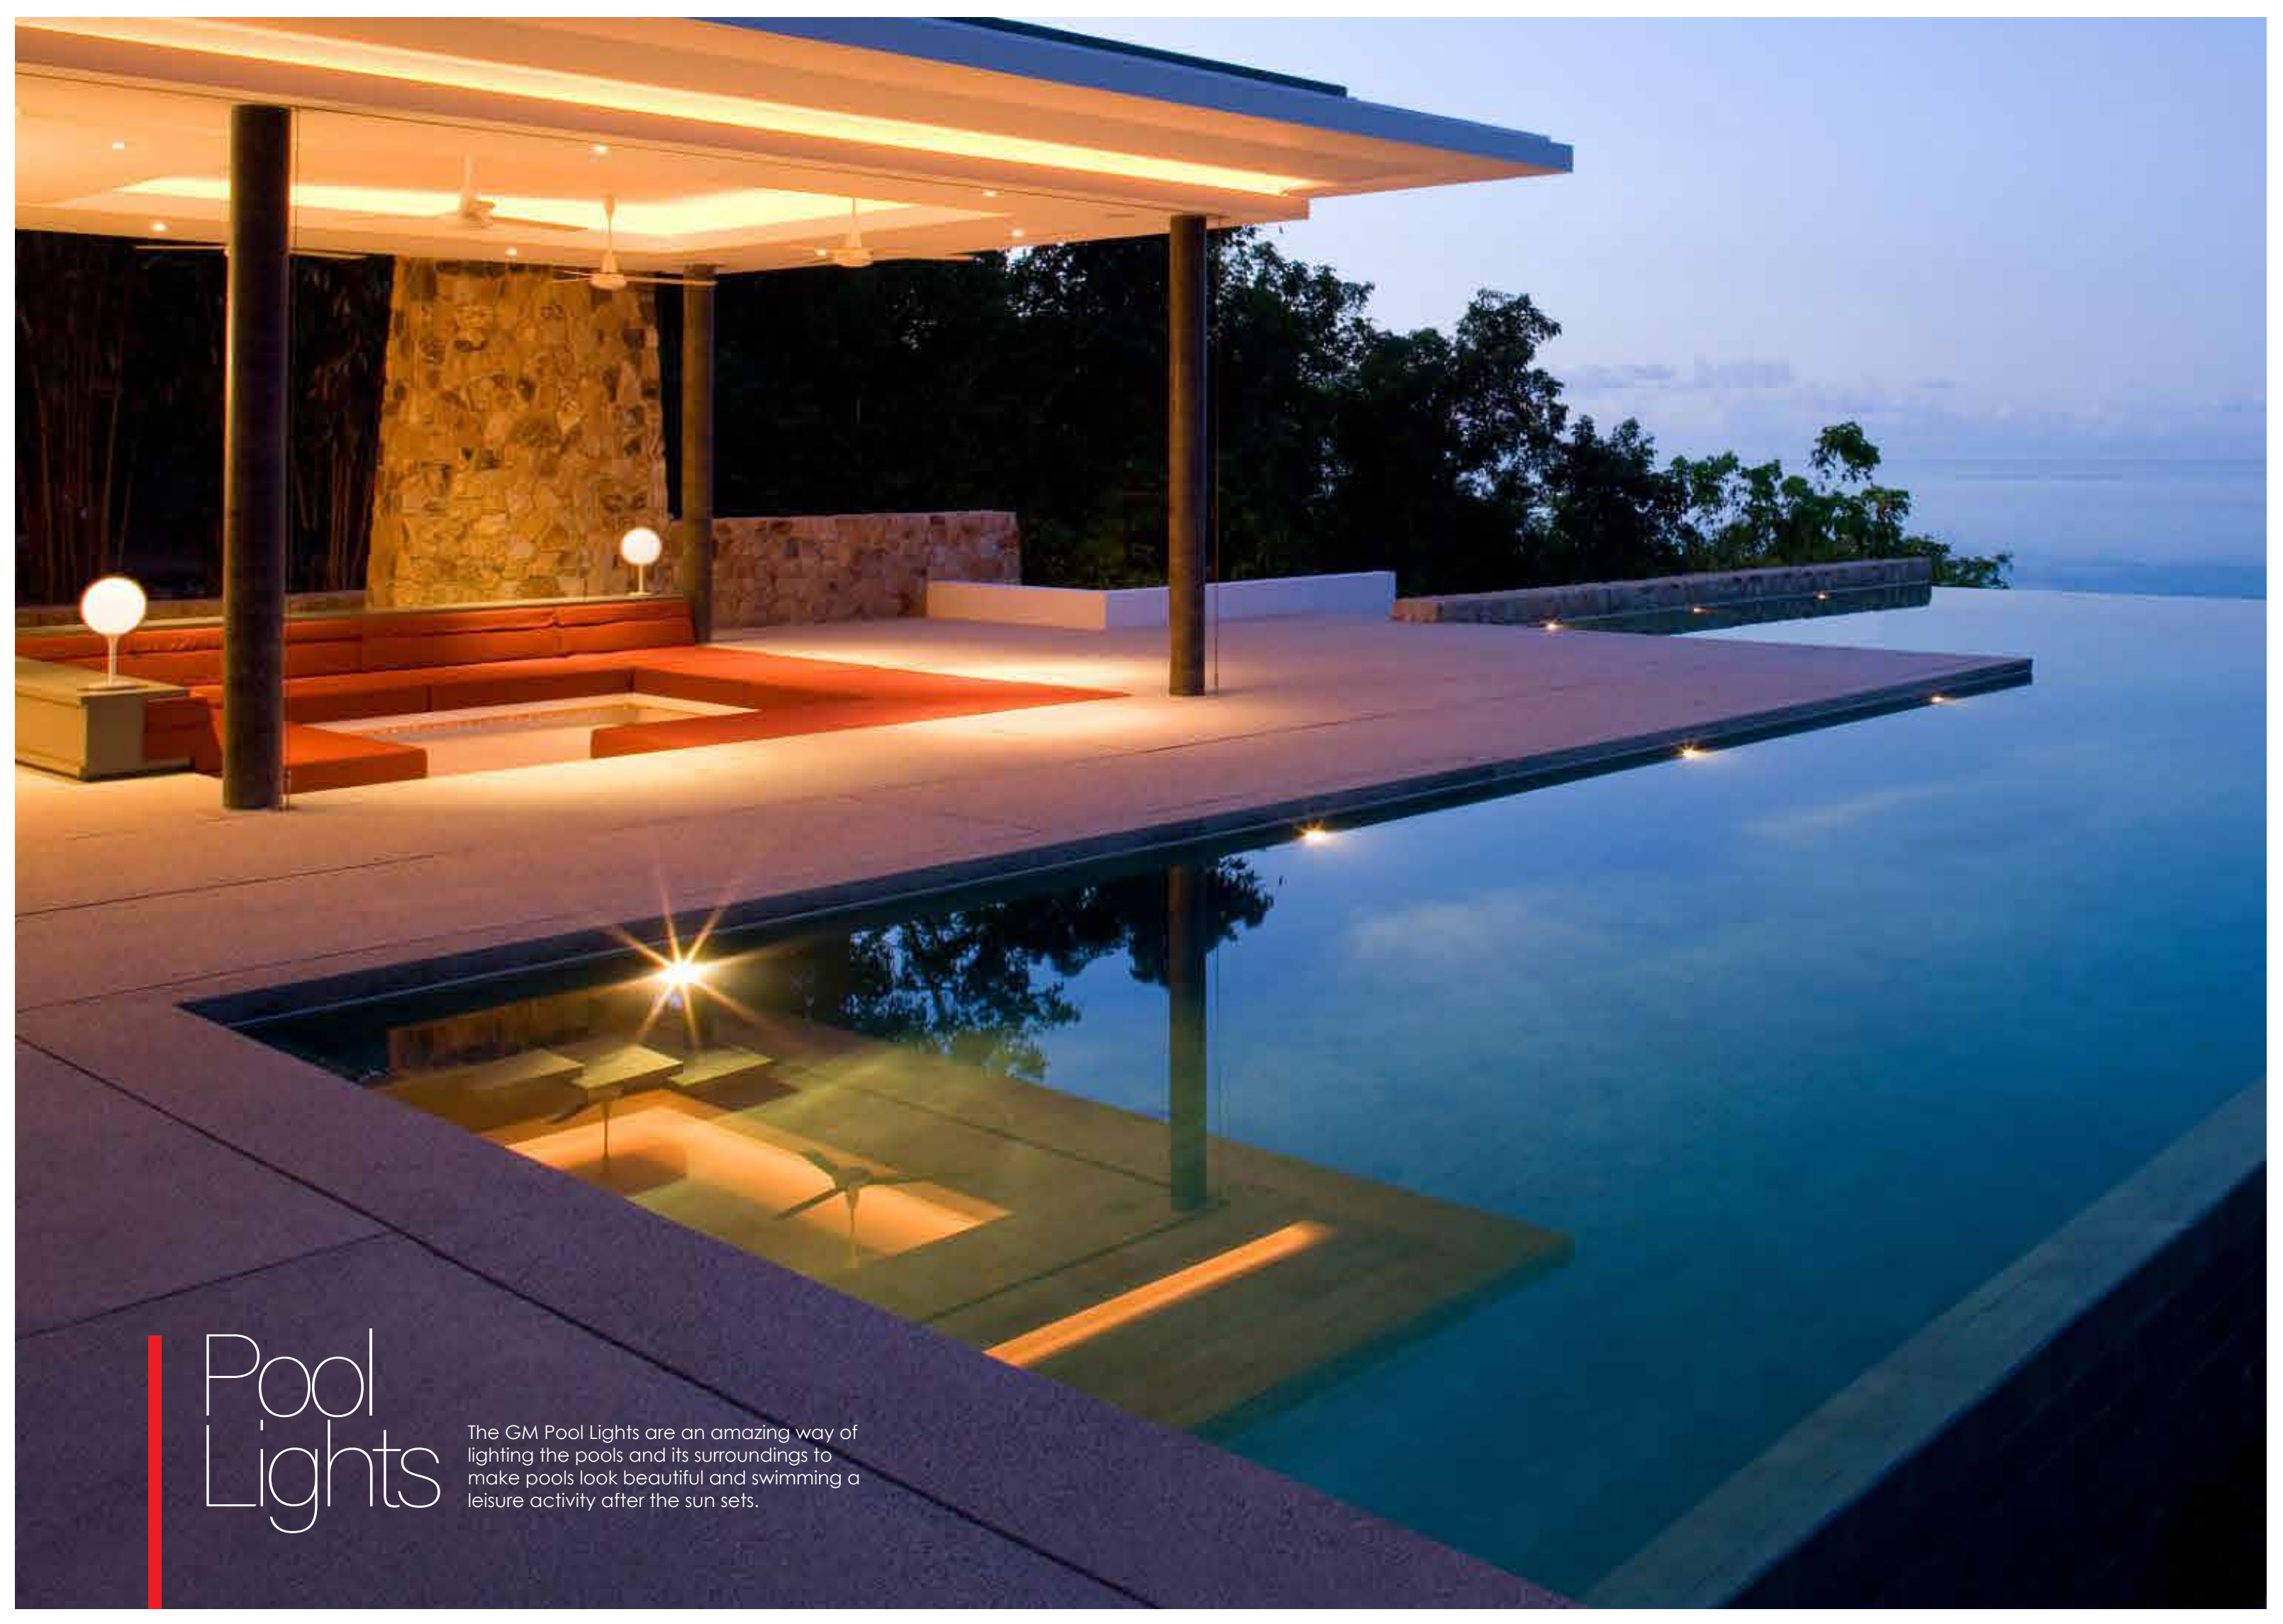

Pool Lights

The GM Pool Lights are an amazing way of lighting the pools and its surroundings to make pools look beautiful and swimming a leisure activity after the sun sets.

It is Bright Even Under Water



Swimming Pool Light

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 1
Product Code	GM-FC-PL-P1-12-XXXX
Wattage	12W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/Connectors	Power and DMX
Product Size	Ø260 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 2
Product Code	GM-FC-PL-P1-18-XXXX
Wattage	18W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/Connectors	Power and DMX
Product Size	Ø260 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 3
Product Code	GM-FC-PL-P1-27-XXXX
Wattage	27W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/Connectors	Power and DMX
Product Size	Ø295 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 4
Product Code	GM-FC-PL-P1-36-XXXX
Wattage	36W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/Connectors	Power and DMX
Product Size	Ø295 x 70mm

*CCT:XXXX

Brighten Up Your Leisure Time



Swimming Pool Light

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 5
Product Code	GM-FC-PL-P2-12-XXXX
Wattage	12W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/ Connectors	Power and DMX
Product Size	Ø260 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 6
Product Code	GM-FC-PL-P2-18-XXXX
Wattage	18W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/ Connectors	Power and DMX
Product Size	Ø260 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 7
Product Code	GM-FC-PL-P2-27-XXXX
Wattage	27W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/ Connectors	Power and DMX
Product Size	Ø295 x 70mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 8
Product Code	GM-FC-PL-P2-36-XXXX
Wattage	36W
CCT	2200K-6000K / RGB
Protection Rating	IP68
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High-speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20°C~45°C
Cable/ Connectors	Power and DMX
Product Size	Ø295 x 70mm

*CCT:XXXX



Blue and Beautiful



Swimming Pool Light

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 9
Product Code	GM-FC-PL-P3-3-XXXX
Wattage	3W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body
Product Size	Ø125 x 40mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 10
Product Code	GM-FC-PL-P3-6-XXXX
Wattage	6W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body
Product Size	Ø165 x 40mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 11
Product Code	GM-FC-PL-P3-9-XXXX
Wattage	9W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body
Product Size	Ø230 x 40mm

*CCT:XXXX



Pearls for Your Pools



Swimming Pool Light

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 12
Product Code	GM-FC-PL-P4-12-XXXX
Wattage	12W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body (PVC)
Product Size	Ø230 x 40mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 13
Product Code	GM-FC-PL-P4-18-XXXX
Wattage	18W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body (PVC)
Product Size	Ø230 x 40mm

Product Specification	
Product Category	Swimming Pool Light
Product Name	Dive 14
Product Code	GM-FC-PL-P4-36-XXXX
Wattage	36W
CCT	2200K- 6000K/ RGB
Protection Rating	IP68
Beam Angle	15°, 20°,25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body (PVC)
Product Size	Ø230 x 40mm

*CCT:XXXX

Glow Garden Light

The GM Glow Garden Lights are an amazing way of lighting the parks and its surroundings. Enhancing the look of parks, the lights make taking a stroll or relaxing in a garden a much more beautiful experience during the evenings and nights.



Naturally Lighting Up Nature



Tree 1



Tree 2




Crit

Glow Garden Light

Product Specification	
Product Category	Glow Garden Light
Product Name	Tree 1
CCT	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
Producu Size	3000mm / 4000mm

Product Specification	
Product Category	Glow Garden Light
Product Name	Tree 2
CCT	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
Product Size	3000mm / 4000mm


Product Specification	
Product Category	Glow Garden Light
Product Name	Crit
CCT	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
Product Size	520mm x 300mm x 900mm

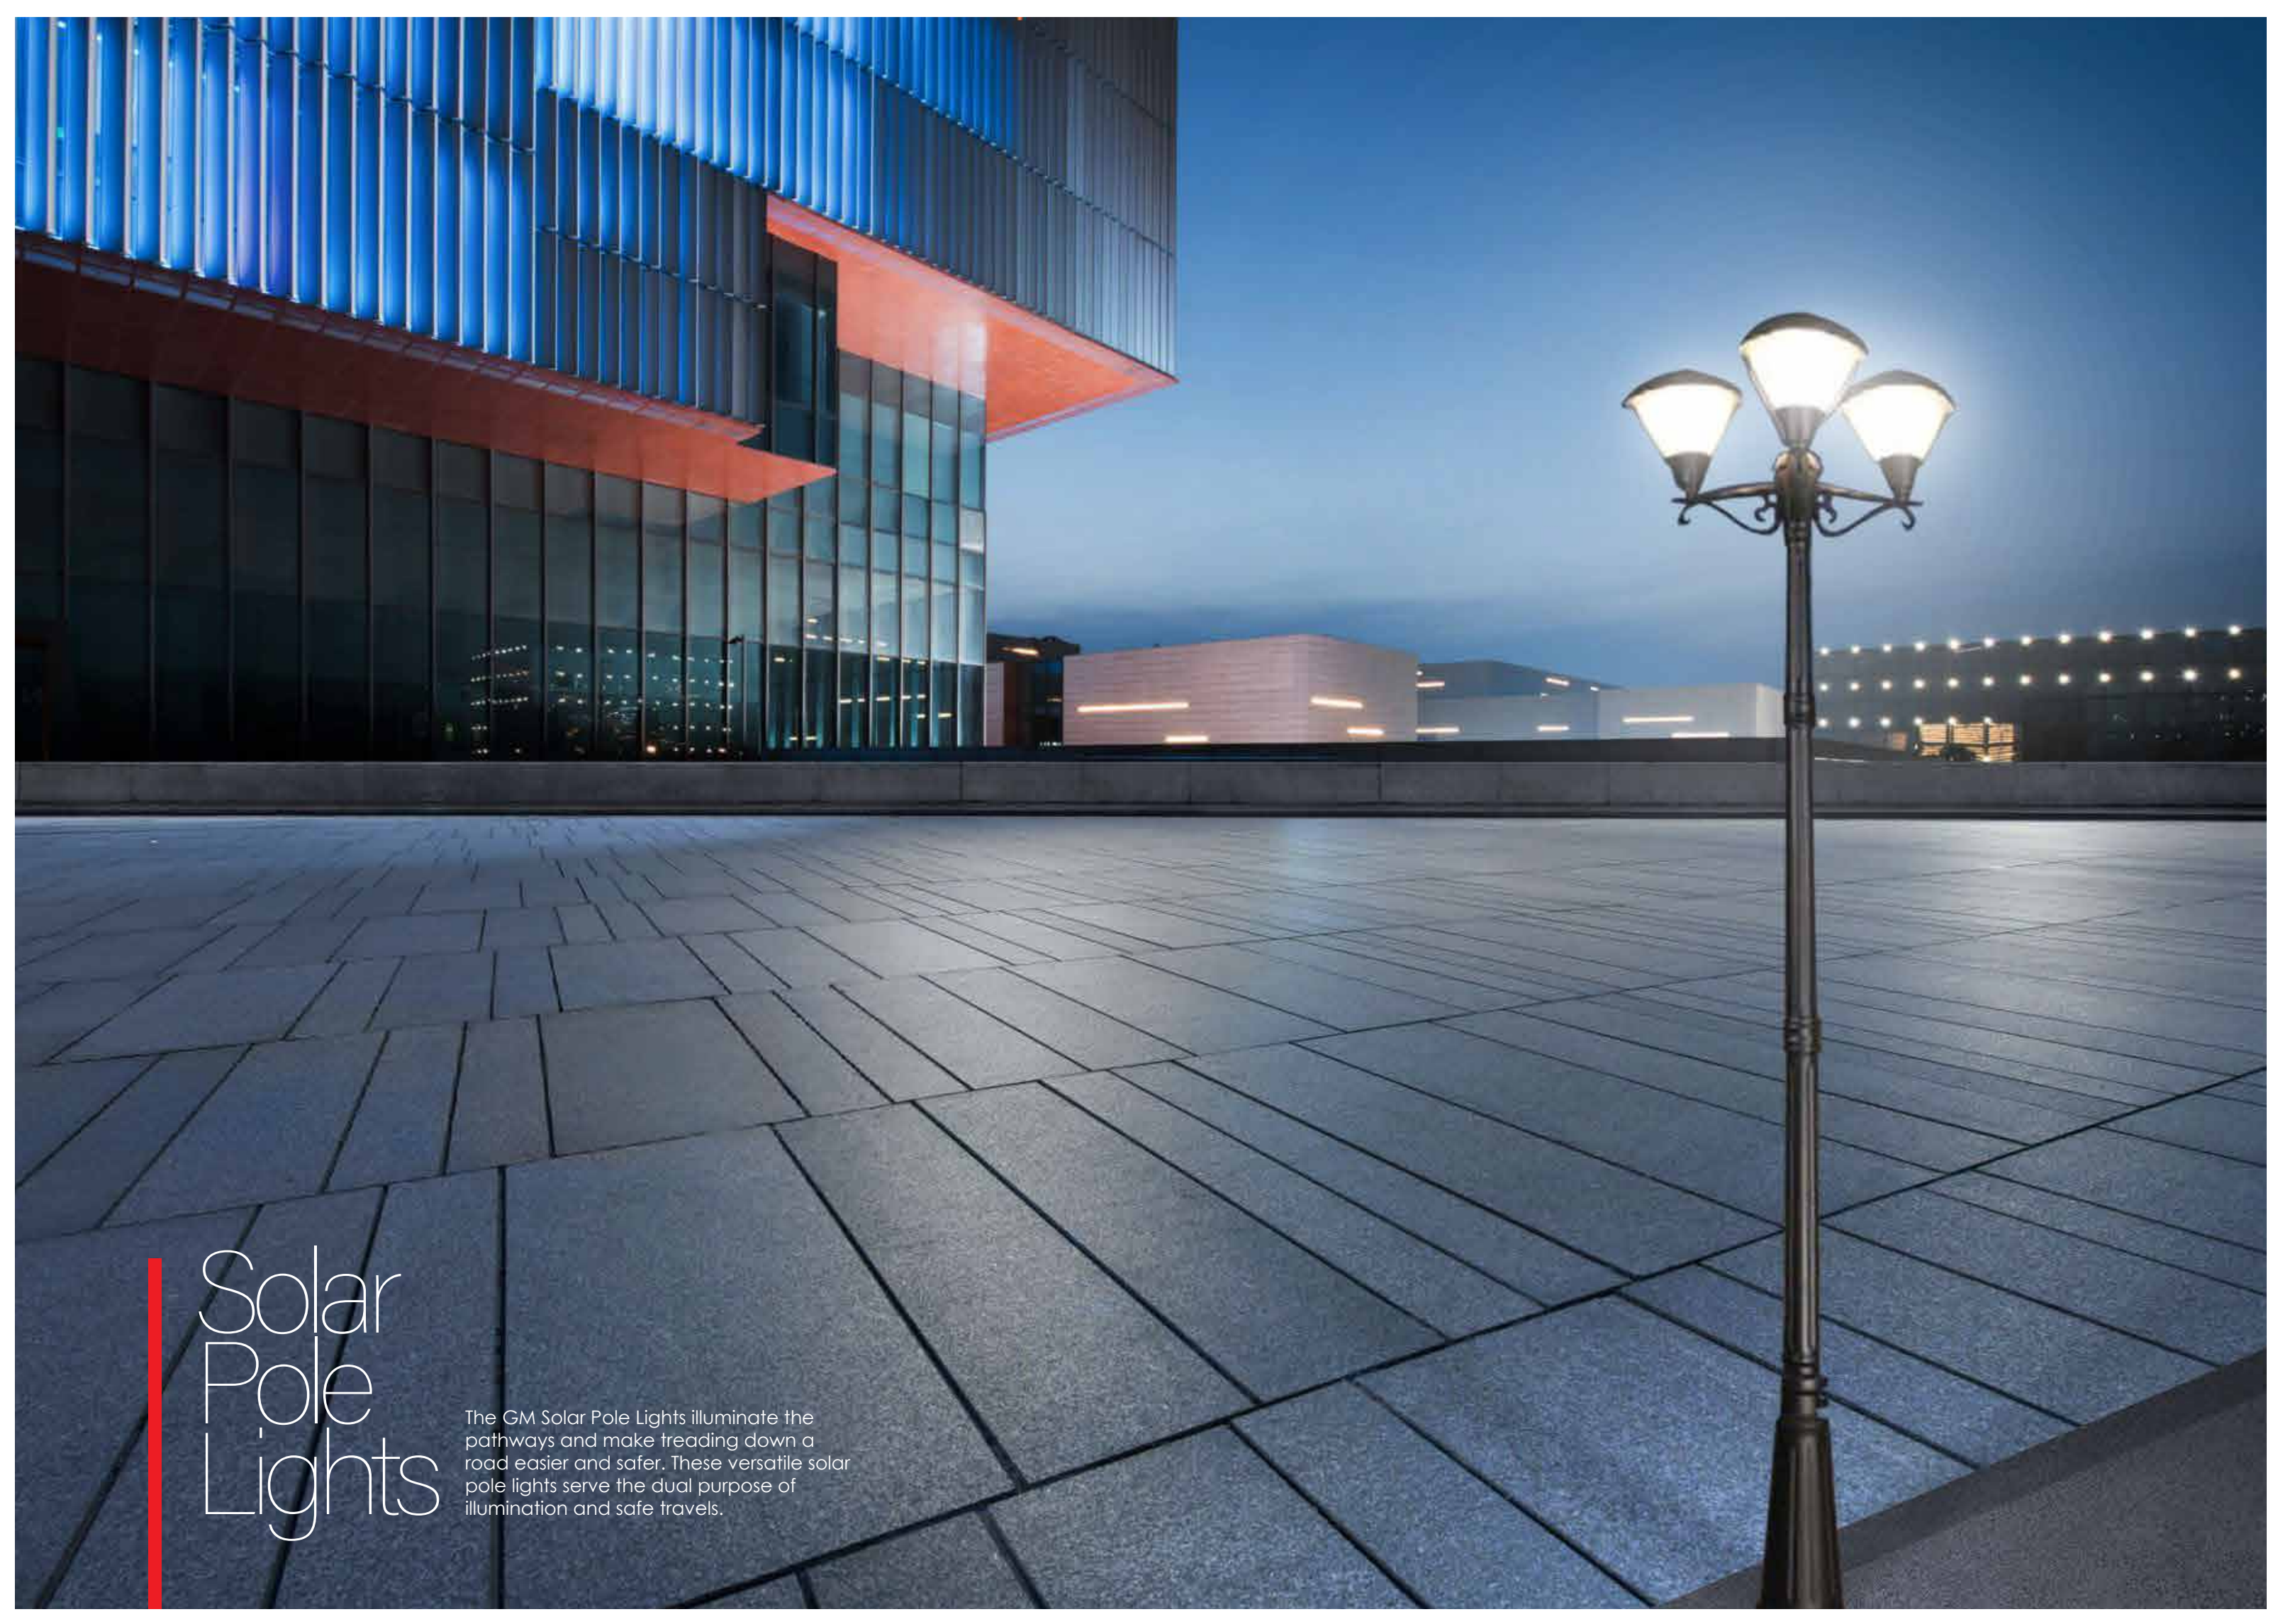

Solar Pole Lights



The GM Solar Pole Lights illuminate the pathways and make treading down a road easier and safer. These versatile solar pole lights serve the dual purpose of illumination and safe travels.

Store Energy to Light-up the Nights

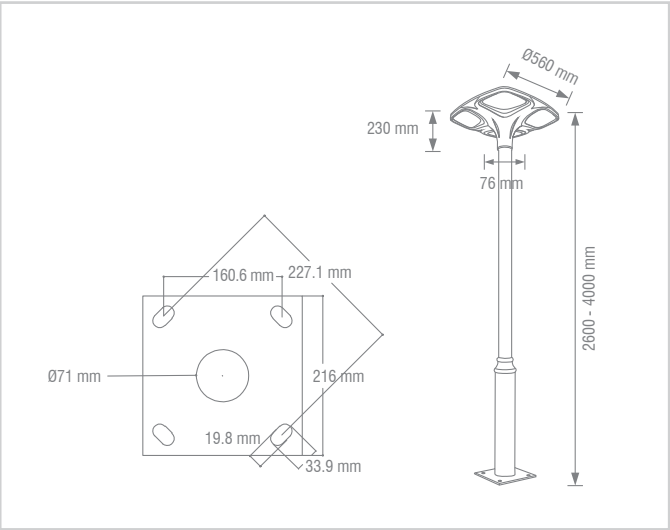

Solar Pole Lights


Product Specification	
Product Category	Solar Pole Lights
Product Name	Vigo 1
Product Code	GM-FC-S0-PT-32-3000K / 6000K
Wattage	32W
Solar Panels	5V/32W
Battery	3.2V/45000mAh
Colour Temperature	3000K-6000K
Charge Time	3-5 Hrs
Protection Rating	IP66
Material Quality	Aluminium
Size	560x560xH230mm





For a Memorable Journey



Vigo 2

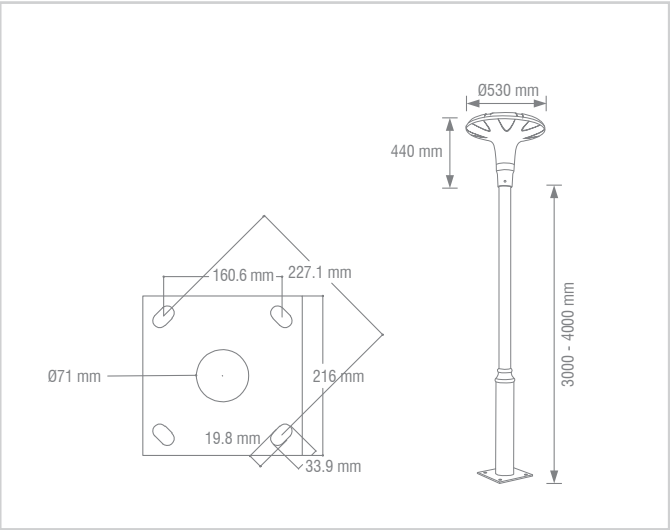

Solar Pole Lights




Product Specification	
Product Category	Solar Pole Lights
Product Name	Vigo 2
Product Code	GM-FC-S0-PT-25-3000K / 6000K
Wattage	25W
Solar Panels	5V/25W
Battery	3.2V/30000mAh
Colour Temperature	3000K-6500K
Charge Time	3-5 Hrs
Protection Rating	IP66
Material Quality	Aluminium
Size	Ø530xH440mm

Let There Never
Be a Dark Turn





Vigo 3 / Vigo 4 / Vigo 5

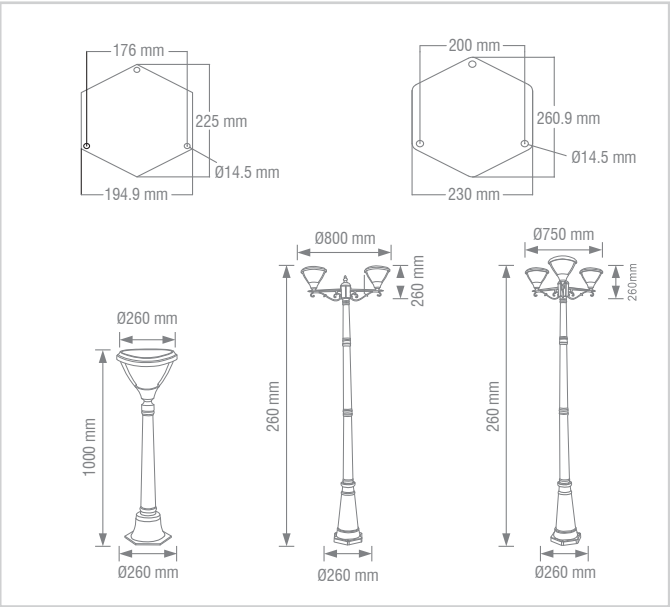

Solar Pole Lights

Product Specification			
Product Category	Solar Pole Lights	Solar Pole Lights	Solar Pole Lights
Product Name	Vigo 3	Vigo 4	Vigo 5
Product Code	GM-FC-S0-PT-4.5-XXXX	GM-FC-S0-PT-4.5x2-XXXX	GM-FC-S0-PT-4.5x3-XXXX
Wattages	4.5W / 5V	4.5W x 2 / 5V	4.5W x 3 / 5V
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Battery	3.2V/8000mAh	3.2V/16000mAh	3.2V/24000mAh
Charge Time	3-5 Hrs	3-5 Hrs	3-5 Hrs
Protection Rating	IP66	IP66	IP66
Material Quality	Aluminium	Aluminium	Aluminium
Size	Ø260xH1000mm	Ø800xH2600mm	Ø750xH2600mm



*CCT: XXXX



Light Up to Bright Up



Solar Pole Lights



Optical sensing

2835LED




3.2V~



incl.

30PCS*1

Product Specification			
Product Category	Solar Pole Lights	Solar Pole Lights	Solar Pole Lights
Product Name	Vigo 6	Vigo 7	Vigo 8
Product Code	GM-FC-S0-PT-12-6000K	GM-FC-S0-PT-18-6000K	GM-FC-S0-PT-22-6000K
Wattages	12W / 6V	18W / 6V	22W / 6V
CCT	6000K	6000K	6000K
Battery	12Ah/3.2V	14Ah/3.2V	18Ah/3.2V
Charge Time	3-5 Hrs	3-5 Hrs	3-5 Hrs
Protection Rating	IP66	IP66	IP66
Material Quality	Aluminium	Aluminium	Aluminium
Size	Ø437x123mm	Ø410x122mm	Ø572x123mm

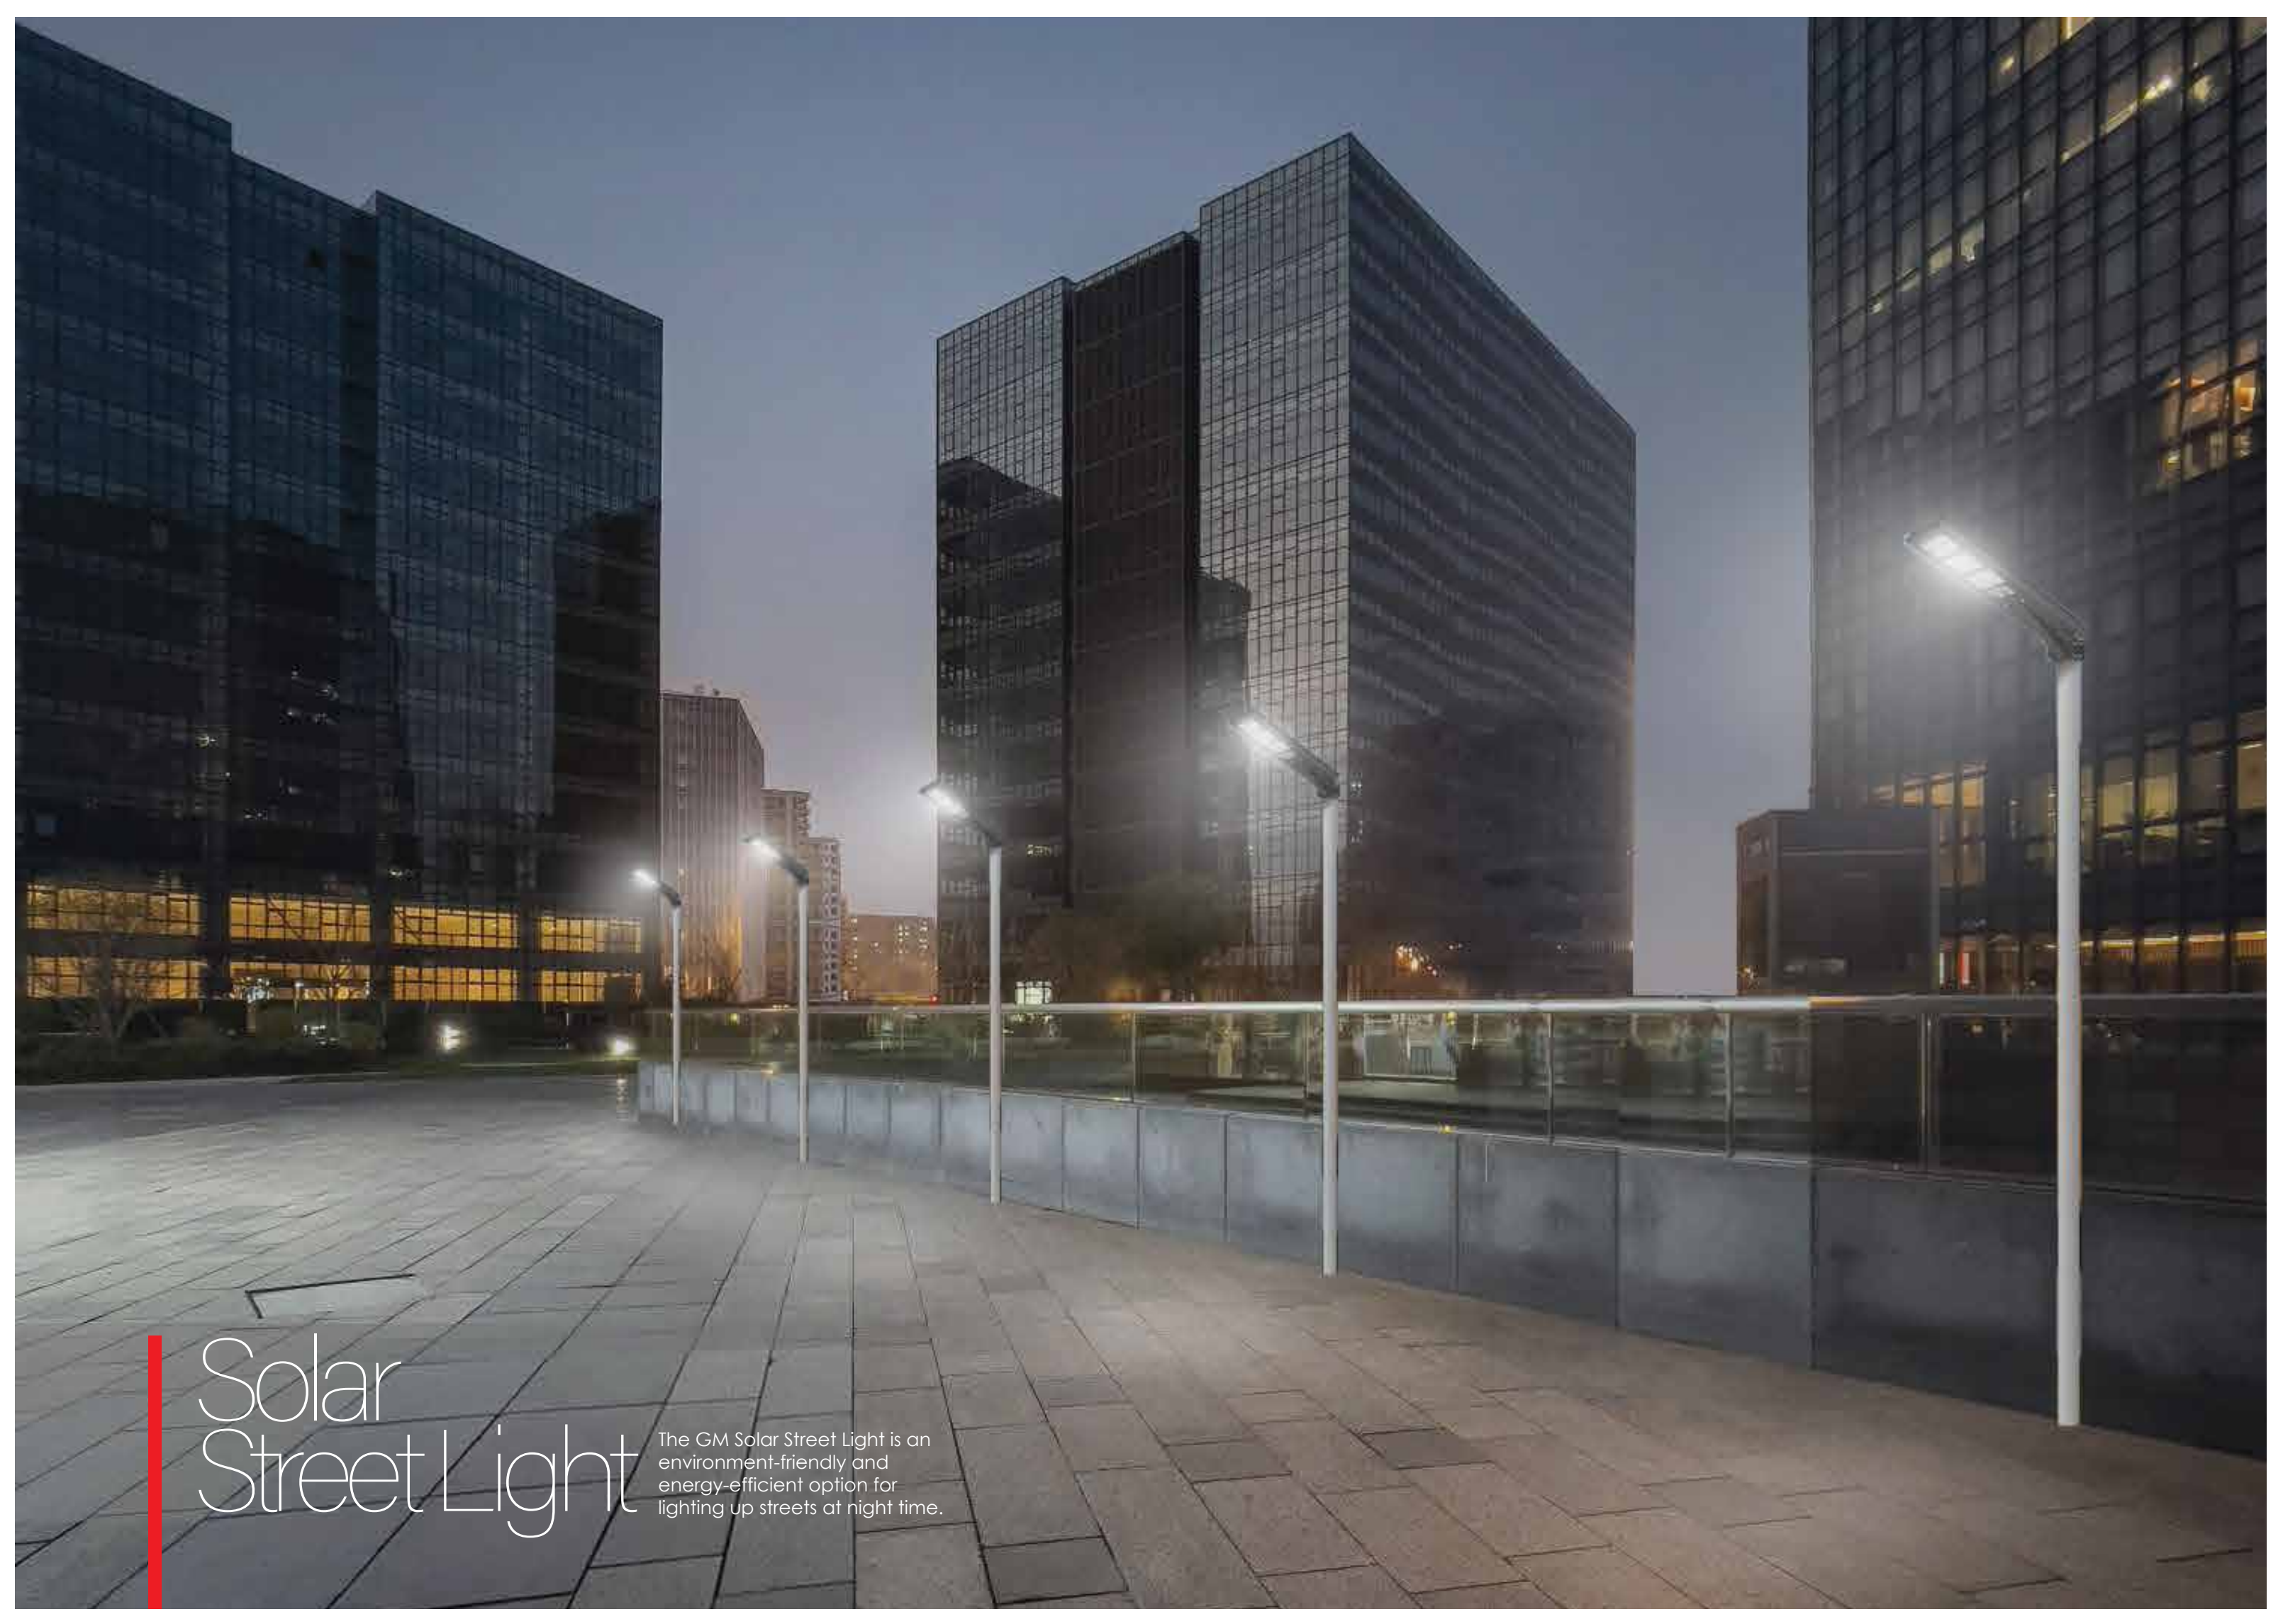

Solar Street Light

The GM Solar Street Light is an environment-friendly and energy-efficient option for lighting up streets at night time.

Nights are Now Safer



Mono panel



Chip



sensor switch




Wall/Pole install



Pro-Double-MPPT



Solar 1
30W

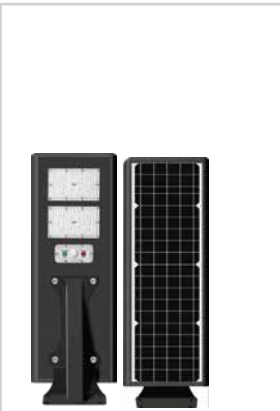





Solar 2
50W



Solar 3
70W



Solar 4
100W



Solar Street Light

Product Specification				
Product Category	Solar Street Light	Solar Street Light	Solar Street Light	Solar Street Light
Product Name	Solar 1	Solar 2	Solar 3	Solar 4
Product Code	GM-FC-SO-30-6000K	GM-FC-SO-50-6000K	GM-FC-SO-70-6000K	GM-FC-SO-100-6000K
Power	30W	50W	70W	100W
Solar Panel	10W 6V	15W 6V	20W 6V	25W 6V
Battery	6AH 3.2V	12AH 3.2V	18AH3.2V	24AH3.2V
LED Quantity	30pcs	60pcs	90pcs	150pcs
Dimension	580*215*140mm	675*190*140mm	715*190*140mm	870*190*140mm
CCT	6000K	6000K	6000K	6000K
Beam Angle	120°	120°	120°	120°
Protection Rating	IP66	IP66	IP66	IP66
Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	3 years	3 years	3 years	3 years
Application	Villa, school, countryside, rural area, community, villages and towns			
Specification	1. With mono solar panel in high working efficiency >21% 2. PRO-Double MPPT advanced charge controller, 40%-50% conversion efficiency than normal PWM3. 3. Working Time: 12 hours. Working Mode: Light Control+Sensor. Guaranteed 365 days light.			

Smart Pole Lights



The GM Smart Pole Light is an intelligent choice to keep streets safe and illuminated throughout the night.

Sensible Nighttime Illumination

The smart lighting system is designed to solve the problems of switching, inaccurate lighting times, inspection & fault handling difficulties, and uncontrollable lighting rates in traditional urban street lights.

Smart Pole Lights



Product Specification
Product Category: Smart Pole Lights Product Name: Smart Pole
Smart Lighting Controlling System Remotely control (ON/OFF, dimming, data collecting, alarm etc.) in real time by computer, mobile phone, PC, PAD, support communication modes like NB-IoT, LoRa, Zigbee etc.
Weather Station System Collect and send data to monitoring center by concentrator, such as weather, temperature, humidity, lighting, PM2.5, noise rainfall, wind speed, etc.
Emergency Call System Connect directly to command center, respond quickly to emergency public security affair and position it.
Mini Basestation
Wireless AP System Support WIFI hotspot in city.
Cameras & Surveillance System Monitor traffic, security lighting, public equipments through cameras & surveillance system on the pole.
Information Publishing System Display the advertisement, public information in words, pictures, videos by remote uploading, high efficient and convenient.
AC Charge Pile Offer more charging stations for new energy vehicles, make it easier for people travelling and speed up the popularization of new energy vehicles.




Pole Lights

The GM Pole Lights are designed to add a safety quotient to outdoors, roads and highways coupled with impressive looks and exceptional functionality.





Lights to Light-up Your Surroundings

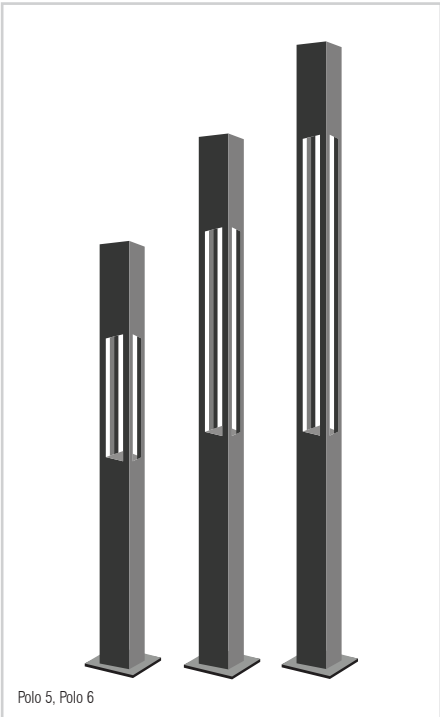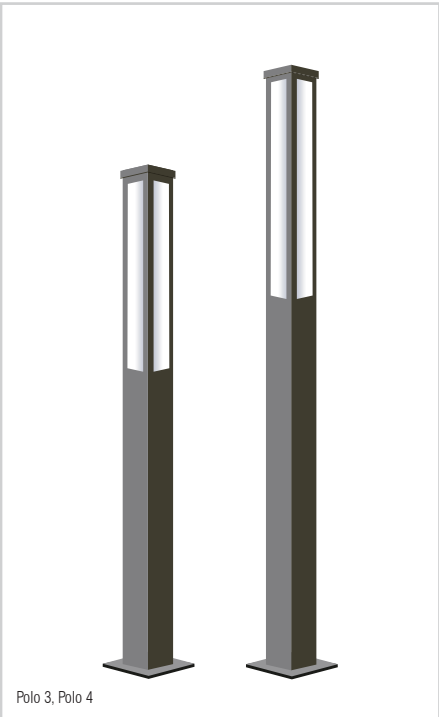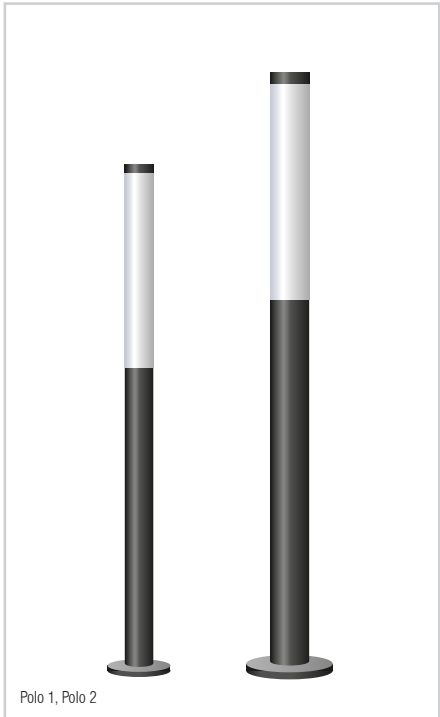

Pole Lights

Product Specification		
Product Category	Pole Lights	
Product Name	Polo 1, Polo 2	
Product Code	GM-FC-PO-XX-XXXX	
Wattage	12W-36W	24W-50W
Power Input	AC 110V-240V, 50 Hz	
CCT	3000K-6000K	
Beam Angle	120°	
CRI	80	
Protection Rating	IP66	
Diameter	Ø75	Ø100
Acrylic Height (L)	300/600/900mm	600/900mm
Pole Height (P)	1200/1800/2400mm	1800/2400/3000mm

Product Specification		
Product Category	Pole Lights	
Product Name	Polo 3, Polo 4	
Product Code	GM-FC-PO1-XX-XXXX	
Wattage	24W	50W
Power Input	AC 110V-240V, 50 Hz	
CCT	3000K-6000K	
Beam Angle	120°	
CRI	80	
Protection Rating	IP66	
Diameter	Ø100	
Acrylic Height (L)	600/900/1200mm	
Pole Height (P)	1800/2400/3000mm	

Product Specification		
Product Category	Pole Lights	
Product Name	Polo 5, Polo 6, Polo 7	
Product Code	GM-FC-PO2-XX-XXXX	
Wattage	24W-50W	
Power Input	AC 110V-240V, 50 Hz	
CCT	3000K-6000K	
Beam Angle	120°	
CRI	80	
Protection Rating	IP66	
Diameter	Ø100	
Pole Height (P)	1800/2400/3000mm	

* WATTAGE:XX
CCT: XXXX

Angelic Glow of Light



Pole Lights

Product Specification	
Product Category	Pole Lights
Product Name	Polo 8
Product Code	GM-FC-P03-XX-XXXX
Wattage	45W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K~6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Diameter	Ø410
Pole Height	3000mm / 4000mm
Base Plate	200x200x12mm

* WATTAGE:XX
CCT: XXXX





Illuminating the Darkness



Polo 9, Polo 10

Pole Lights

Product Specification	
Product Category	Pole Lights
Product Name	Polo 9, Polo 10
Product Code	GM-FC-P04-XX-XXXX GM-FC-P05-XX-XXXX
Wattage	10W / 30W / 50W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* WATTAGE:XX
CCT: XXXX





The Perfect Night Glow



Pole Lights

Product Specification	
Product Category	Pole Lights
Product Name	Polo 11 / Polo 12 / Polo 13 / Polo 14
Product Code	GM-FC-P06-XX-XXXX GM-FC-P07-XX-XXXX GM-FC-P08-XX-XXXX GM-FC-P09-XX-XXXX
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* WATTAGE:XX
CCT: XXXX





Dependable Lighting Choice



Polo 15

Pole Lights

Product Specification	
Product Category	Pole Lights
Product Name	Polo 15
Product Code	GM-FC-P010-XX-XXXX
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* WATTAGE:XX
CCT: XXXX

OUT DOOR **HIGH CRI** **HIGH VISUAL COMFORT** **SURGE PROTECTION**

Vintage Beauty Illuminating Pathways



Pole Lights

Product Specification	
Product Category	Pole Lights
Product Name	Polo 16 / Polo 17 / Polo 18 / Polo 19
Product Code	GM-FC-P011-XX-XXXX
	GM-FC-P012-XX-XXXX
	GM-FC-P013-XX-XXXX
	GM-FC-P014-XX-XXXX
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* WATTAGE:XX
CCT: XXXX





It Lights Up from Tip to Toe




Street Light with Pole

Product Specification	
Product Category	Street Light with Pole
Product Name	Polar 1 / Polar 2 / Polar 3 / Polar 4
Product Code	GM-FC-P015-XX-XXXX
	GM-FC-P016-XX-XXXX
	GM-FC-P017-XX-XXXX
	GM-FC-P018-XX-XXXX
Wattage	10W / 30W / 50W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* WATTAGE:XX
CCT: XXXX



Standing Tall by Your Side to Keep You Safe

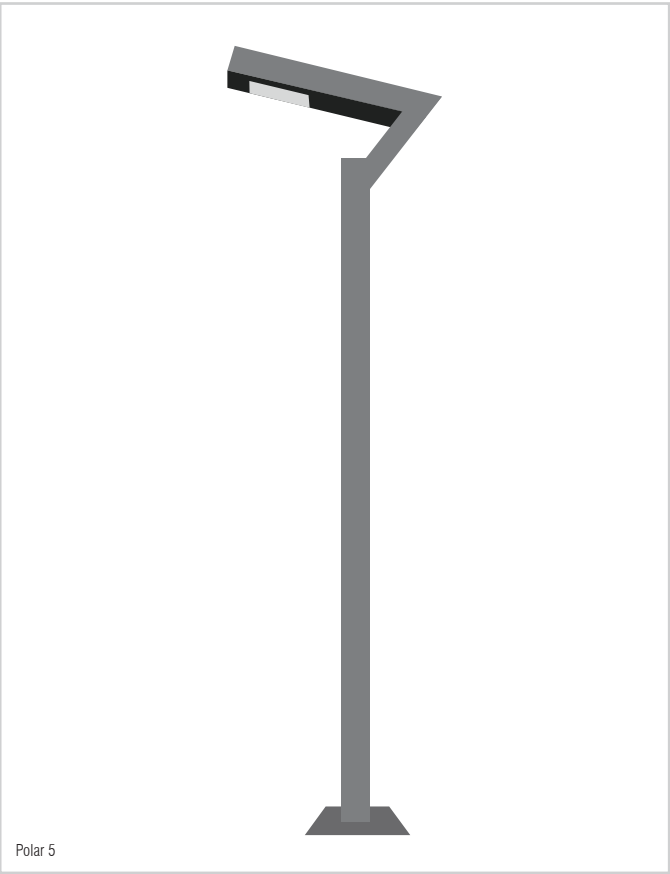

Street Light with Pole

Product Specification	
Product Category	Street Light with Pole
Product Name	Polar 5
Product Code	GM-FC-P019-30-XXXX
Wattage	30W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
PCD	200mm / 225mm

* CCT: XXXX

Journey Under a Spotlight



Polar 6

Street Light with Pole

Product Specification	
Product Category	Street Light with Pole
Product Name	Polar 6
Product Code	GM-FC-P020-30x2-XXXX
Wattage	30W x 2
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm / 4000mm
Base Plate	12" x 12" x 10mm

* CCT: XXXX



Brilliant Lighting and Stylish Looks



Polar-X

Street Light with Pole

Product Specification	
Product Category	Street Light with Pole
Product Name	Polar-X
Product Code	GM-FC-P021-18-XXXX
Wattage	18W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm
Base Plate	10" x 10" x 10mm

* CCT: XXXX



Butterfly Shaped Beautiful Brilliance



Polar-F

Street Light with Pole

Product Specification	
Product Category	Street Light with Pole
Product Name	Polar-F
Product Code	GM-FC-P022-20-XXXX
Wattage	20W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6000K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm
Base Plate	10" x 10" x 10mm

* CCT: XXXX

Our Clientele

Take a look at our amazing collaborative partners who have been with us consistently and added to our prosperity.



And many more...

Exclusive experience centres



INDIA

Mumbai - Andheri
GM Luxury Lighting - Experience Center
Unit No. 21, Q/G, Laxmi Industrial Estate, Next to Laxmi Chhaya Hotel, New Link Road, Andheri (W) Mumbai - 400 053, Maharashtra. Email: info@gmmmodular.com

Ahmedabad
07, Ground Floor, Times Square Grand, Near Satva Vikas School, Sindhu Bhavan Main Road, Thaltej, Ahmedabad - 380059 Email: info@gmmmodular.com

Calicut
GM Avenue, 1st Floor, Red Cross Road, Calicut - 673 032, Kerala. Email: info@gmmmodular.com Contact: 0495-277 3500.

Jalore
Near Kanchangiri Jain Temple, Opp. Hardev Joshi Circle, Bagoda Road, Jalore - 343 001, Rajasthan. Email: info@gmmmodular.com Contact: 02973-222288 +91 97769 79283.

Ranchi
Mahavir Chowk, Upper Bazar, Ranchi - 834 001, Jharkhand. Email: info@gmmmodular.com Contact: 065-1355 1309 +91 94715 55599.

Mumbai - Andheri
G-6, Laxmi Industrial Estate, Opp. Laxmi Chhaya Hotel, New Link Road, Andheri (W) Mumbai - 400 053, Maharashtra. Email: info@gmmmodular.com Contact: +91 8879918221.

Belagavi
Shop No. 571, Bhati Tower, Patil Galli, Belgaum - 590 001, Karnataka. Email: info@gmmmodular.com Contact: +91 9886716370.

Chennai - Egmore
Stat. No. F50, F51 & F52, 1st Floor, Build HQ, Raja Annamalai Building, Rukmani Lakshmiipathi Road, Egmore, Chennai - 600008, Tamil Nadu. Email: info@gmmmodular.com Contact: +91 99449 43348.

Kochi
Compass Building, Gr. floor, NH by pass, Chakkraparampu, Thammannam, Kochi 682032. Email: info@gmmmodular.com

Surat
Nilkanth House, 29 to 32, Ambika Industrial Society, Opp. Gandhi Kuti, U M Road, Bhatar, Surat - 395017, Gujarat. Email: info@gmmmodular.com Contact: +91 9152088884.

Mumbai - Lohar Chawl
Shop No.1 Plot No. 151/153, Bhabha Building, Lohar Chawl, Mumbai - 400 002, Maharashtra. Email: info@gmmmodular.com Contact: 022 - 2206 6545

Bengaluru
440/20/1, 30th Cross, 8th B Main Road, 4th Block, Beside Jain Temple, Jayanagar, Bengaluru - 560 011, Karnataka. Email: info@gmmmodular.com Contact: 080 - 4097 1188.

Chennai - Anna Salai
Prestige Zackria Metropolitan #200/1-8, Anna Salai, Chennai - 600 002, TN. Email: info@gmmmodular.com Contact: +91 9443151008 +91 97908 40995.

Kolkata
39/40, Ezra Street, Ground Floor, Kolkata - 700 001, West Bengal. Email: info@gmmmodular.com Contact: 033 - 406 02048.

Tirunelveli
48, Raja Building, Tirunelveli - 627 001, Tamil Nadu. Email: info@gmmmodular.com Contact: +91 9443151008.

Bhiwara
G-4, Govindram Commercial Hub, Old RTO Road, Bhiwara - 311 001, Rajasthan. Email: info@gmmmodular.com Contact: +91 89550 48560.

Coimbatore
22, Mill Road, KEZ Building, Coimbatore - 641 001, Tamil Nadu. Email: info@gmmmodular.com Contact: +91 99523 07025.

Noida
C-161, Sector 63, Near Hindustan Times Office, Noida, Uttar Pradesh - 201301. Email: info@gmmmodular.com Contact: +91 9675226491.

Vijayawada
Shop no: 15-18, K. S Vyas Complex, K. S Vyas Complex, Opp. Indira Gandhi Municipal Stadium, MG Road, Vijayawada - 520 010, Andhra Pradesh. Email: info@gmmmodular.com Contact: +91 7416614545.

Patna
Ambition Business Centre Gr. Floor, Block A Jamal Road, Patna - 800001. Email: info@gmmmodular.com Contact: +91 70048 36171.

Hyderabad
No. 5-5-84/87, Shop No. 2&3, Kalpakunj Apartment, Jambaug, Hyderabad - 500 012, Telangana. Email: info@gmmmodular.com Contact: 040 - 2473 4545.

Puducherry
No. 298, J.N. Street, Opp. to Sony Centre Showroom, Puducherry - 605001. Email: info@gmmmodular.com Contact: 04134500222 +91 9152351213.

Vijayawada
Shop no: 17 - 18, Ground Floor, K. S Vyas Complex, Opp. Indira Gandhi Municipal Stadium, MG Road, Vijayawada - 520 010, Andhra Pradesh. Email: info@gmmmodular.com Contact: +91 7416614545.

INTERNATIONAL

Bhutan
T. D. ENTERPRISES
P.O. Box 1162,
Hong Kong Market
Thimphu, Bhutan.

UAE - Dubai
GMM NEXUS FZCO
1701, 17th floor,
Clover bay tower,
business bay, Dubai, U.A.E.
Contact: +971-566969397

Kenya
RAMCO LIMITED
Nine Grove, Grevillea Grove,
Brookside, Westlands,
P.O. box 18833-00500
Nairobi, Kenya
Email: info@gapostrophe.co.ke
Contact: +254 732004332

Spain
ELECTRIC GMM EUROPE S.A.
Calle Valdeon 28, Fuenlabrada,
28947 Madrid, Spain
Contact: +34 677 62 09 45

Botswana
CHOPPIES DISTRIBUTION
CENTRE (PTY) LTD.
P.O. Box 00278, Plot No: 880,
Unit 4, Gaborone International
Commerce Park,
Gaborone, Botswana.

Ghana
GLOBAL LIGHTING CENTRE LIMITED
Soromall, 18 Spintex Road,
Baatsona, P.O. box St 527,
Accra, Ghana
Email: info@globalightingcentre.com
Contact: +233 0208130919

Nepal
DELTA MARKETING SUPPLIERS
Lazimpat, Kathmandu, 44600, Nepal.
Email: info@jantacable.com
Contact: +977 9801018007

Sri Lanka
DEVREX TRADING PVT. LTD.
50/5, Polawatta Road,
Nugegoda, Sri Lanka.
Contact: +94 766906873

UAE - Dubai
GMM ELECTRICALS LLC
AL Tayer Warehouse #38,
Behind NICO International,
P.O. Box No. 132 456,
Al Quoz Industrial Area 1, Dubai, UAE.
Contact: +971-4354 4036

Greece
ELEKTROMELETI AD HD LTD.
29 Epirou & 15 Etolias Str.
15231 Halandri - Athens
Contact: +30 210 6827305

Russia
LLC PRIMTEK
Moscow Region, City - Noginsk,
Street - Ilich Techno Park Zhilino, Russia.
Contact: +7 9229914368

Switzerland
HELOW AG
6 Bundesstrasse 6300 ZUG,
Switzerland.
Contact: +41 79 557 4750

Concept, Design, Product Visualization GM Modular Pvt. Ltd.
Printing Mumbai, India. Possible colour variations in product images in the catalogue.

We reserve the right to make technical changes to the products as well as amendments to the content of this document at any time without prior notice. The agreed properties are definitive for any orders placed.

GM Modular Pvt. Ltd. shall not be for any consequences arising from the errors or incomplete information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein.

Reproduction, transfer to third parties or processing of the content including sections thereof, is not permitted without prior expressed written permission from GM Modular Pvt. Ltd.

Copyright © 2019 GM All rights reserved.



N	O	T	E	S
---	---	---	---	---

gmmodular.com